



**ELEVATE**  
LIGHTING SOLUTIONS

# FLAT PANEL



**ELEVATE YOUR SPACE**



# ELEVATE

## LIGHTING SOLUTIONS

# ELEVATE YOUR SPACE

Our mission is to **ELEVATE** your space with our innovative, energy-efficient lighting solutions designed with top-quality and cutting-edge technology. As part of the Ammo International brand, we are committed to providing a seamless experience with top-notch customer service. We strive to become your one-stop shop for convenience delivering expectational electrical and lighting solutions for both commercial and residential construction markets



## VERSATILE AND ENERGY-EFFICIENT BACK-LIT FLAT PANELS

ELEVATE Lighting Solutions LED Back-lit Flat Panels are designed for maximum Flexibility.

These panels feature Field CCT & Lumen Select Technology, allowing you to choose from three color temperatures and three wattage options at installation, delivering up to nine different configurations in a single fixture. The low-profile back-lit design ensures uniform light distribution, while glare-reducing illumination and 10% dimmability create a comfortable, well-lit workspace.

Available in 1x4, 2x2, and 2x4 sizes, with integrated EM battery backup options, these panels are ideal for standard T-grid/drop ceilings. For added installation Flexibility, surface, suspension, and recessed mount kits are sold separately.

ELEVATE Lighting Solutions LED Back-lit Flat Panels are the ideal replacement for traditional fluorescent fixtures, offering high performance and long LED life. Elevate your next project



# OFFICE & HEALTHCARE



# RETAIL & EDUCATION

# FLAT PANELS


## CCT & LUMEN SELECT



## FEATURES

- **Field CCT & Lumen Select Technology** - choose from 3 color temperatures and 3 wattages at installation
- **IC rated** for use in insulated and non-insulated ceilings
- **ETL Sanitation Listed** certified for use in food processing and preparation areas
- **Smooth Dimming**- 0-10V dimming, down to 10%
- **Multiple Size Options**- available in 1x4, 2x2, 2x4 sizes
- **Integrated EM** battery backup option available
- **Mounting Accessory options** Surface, suspension, and recessed mount kits sold separately



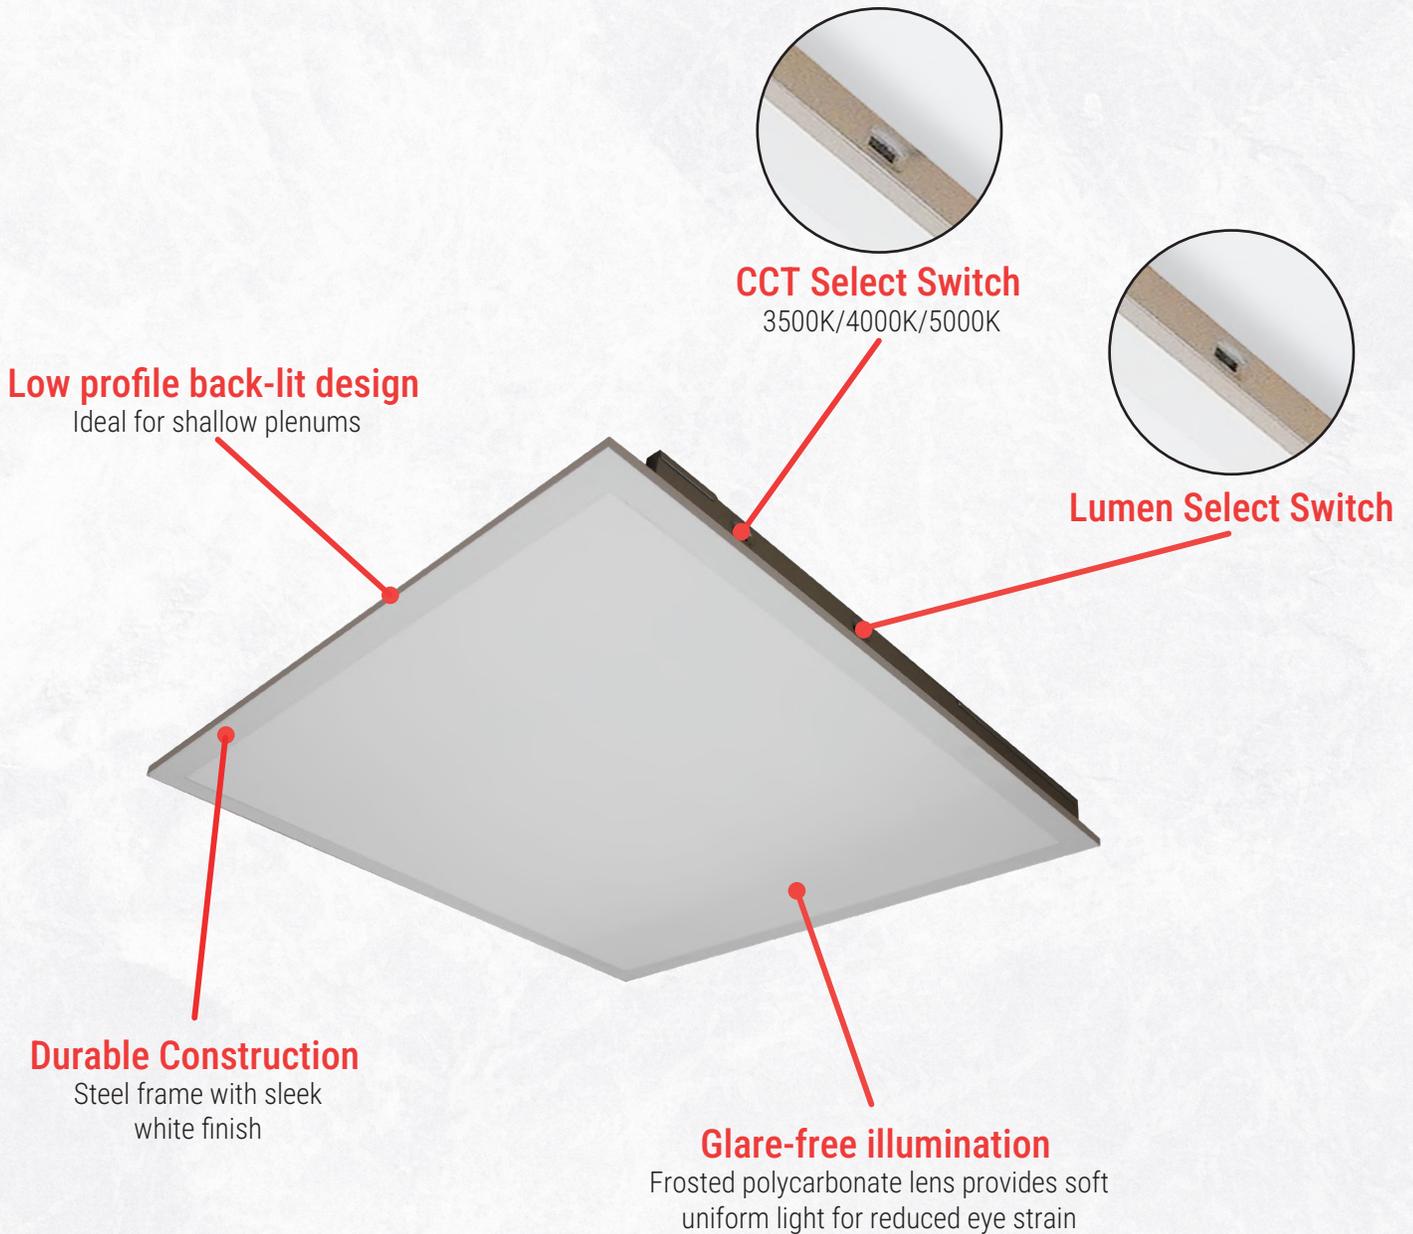

**ELEVATE Lighting Solutions Back-lit Flat Panels are the ideal replacement for traditional fluorescent fixtures, offering high performance and long LED life. ELEVATE your next project**

# FLAT PANELS

## ACCESSORIES

### Enhance installation

With a wide range of mounting solutions designed for every application.

#### SURFACE MOUNT KITS



PNL1X4-FRAMEKIT




PNL2X4-FRAMEKIT



PNL2X2-FRAMEKIT


#### RECESSED MOUNT KITS

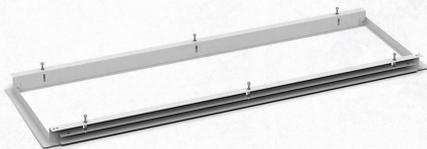

PNL1X4-RMDWKIT



PNL2X4-RMDWKIT

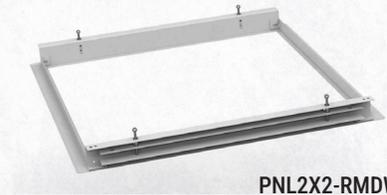

PNL2X2-RMDWKIT

#### SUSPENSION MOUNT (CABLE KIT)




PNL-CABLEKIT

ITEM NUMBER	UPC	DESCRIPTION	DIMENSIONS	MASTER PACK QTY
PNL-CABLEKIT	837654141113	8FT CABLE KIT FOR FLAT PANELS	8FT	50
PNL1X4-FRAMEKIT	837654141120	FRAME KIT FOR 1X4 FLAT PANELS	48" x 12" x 2.4"	10
PNL2X2-FRAMEKIT	837654141120	FRAME KIT FOR 2X2 FLAT PANELS	24" x 24" x 2.4"	10
PNL2X4-FRAMEKIT	837654141144	FRAME KIT FOR 2X4 FLAT PANELS	48" x 24" x 2.4"	10
PNL1X4-RMDWKIT	837654141151	RECESSED MOUNT FRYWALL KIT FOR 1X4 FLAT PANEL	49" x 13" x 1.5"	10
PNL2X2-RMDWKIT	837654141168	RECESSED MOUNT FRYWALL KIT FOR 2X2 FLAT PANEL	25" x 25" x 1.5"	10
PNL2X4-RMDWKIT	837654141175	RECESSED MOUNT FRYWALL KIT FOR 2X4 FLAT PANEL	49" x 25" x 1.5"	10

# FLAT PANELS

## SPECIFICATIONS

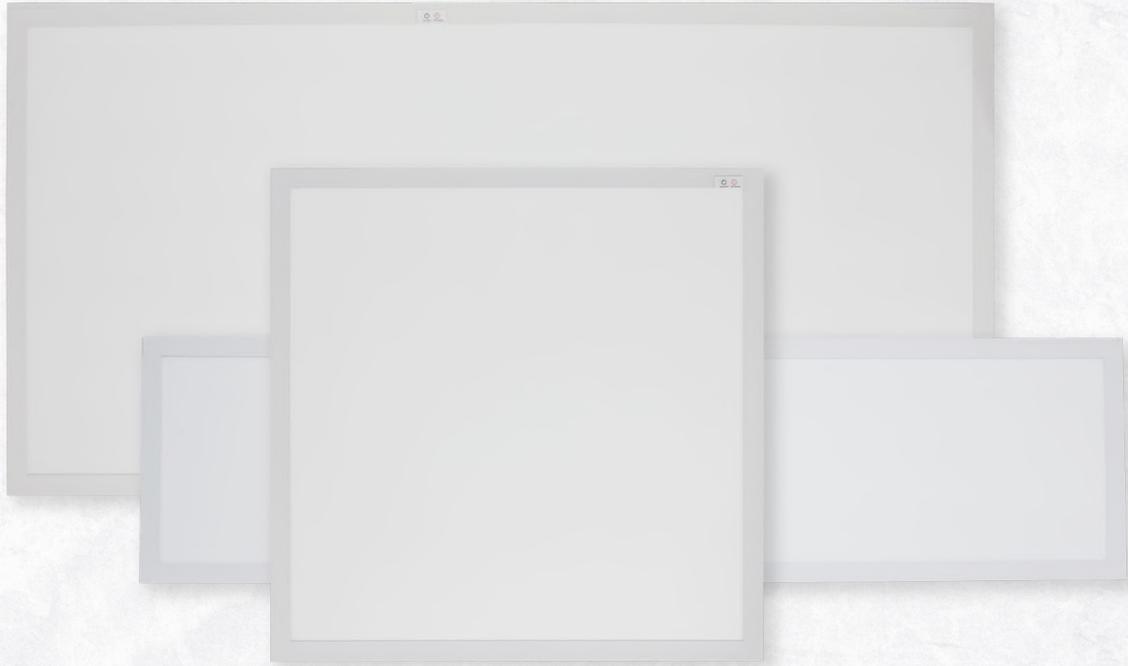

### Install Sheet



Scan for more Info

### Spec Sheet




Scan for more Info

ITEM NUMBER	SIZE	INPUT VOLTAGE / AMPS	WATTAGE SELECT	LUMEN (LM) AT			CCT SELECTABLE	CRI	FLUORESCENT REPLACEMENT				
				3500K	4000K	5000K							
PNL14-40CLS-D PNL14-40CLS-DEM	1x4	120-277V 0.159A/0.367A	40W	4,400	4,800	4,500	3500K/4000K/5000K	80	2 x 32W T8				
			30W	3,350	3,580	3,424			2 x 32W T8 LBF				
			20W	2,250	2,360	2,290			2 x 32W T8 LBF				
PNL22-40CLS-D PNL22-40CLS-DEM	2x2	120-277V 0.159A/0.367A	40W	4,474	4,851	4,574			3500K/4000K/5000K	80	2x 32 W T8		
			30W	3,353	3,584	3,424					2 x 32W T8 LBF		
			20W	2,251	2,367	2,294					2 x 32W T8 LBF		
PNL24-50CLS-D PNL24-50CLS-DEM	2x4	120-277V 0.199A/0.458A	50W	5,558	5,986	5,678					3500K/4000K/5000K	80	3x 32W T8
			40W	4,433	4,721	4,536							2 x 32W T8
			30W	3,501	3,698	3,581							2 x 32W T8 LBF







# ELEVATE

LIGHTING SOLUTIONS



## FLAT PANEL