



ELEVATE
LIGHTING SOLUTIONS

DOWNLIGHTS



ELEVATE YOUR SPACE



ELEVATE
LIGHTING SOLUTIONS

ELEVATE YOUR SPACE

Our mission is to **ELEVATE** your space with our innovative, energy-efficient lighting solutions designed with top-quality and cutting-edge technology. As part of the Ammo International brand, we are committed to providing a seamless experience with top-notch customer service. We strive to become your one-stop shop for convenience delivering expectational electrical and lighting solutions for both commercial and residential construction markets



FLEXIBILITY, PERFORMANCE, EFFICIENCY

ELEVATE Lighting Solutions downlight portfolio featuring--**Can-less Wafer Downlight Series**, **Retrofit Recessed Downlight Series**, and our **Disk Light Series** deliver exceptional illumination with energy-efficient performance. Featuring Field CCT Select Technology offering five color temperatures, airtight, and Type-IC ratings, and suitable for wet locations these fixtures are designed with flexibility and reliability in mind. Available in 3" to 6" sizes with smooth and baffle trim options, they are the perfect choice for both new construction and retrofit applications.

LED WAFER DOWNLIGHT CCT SELECT




RoHS



FEATURES

- **Field CCT Select Technology** - choose from five color temperatures at installation
- **Canless Design** - no recessed housing required, features a remote J-Box eliminating the need for traditional fixture setup
- **90 CRI** - delivers exceptional color quality providing rich vibrant colors
- **Type IC Rated** - Rated for use in insulated and non-insulated ceilings
- **CA Compliant** - T24/ JA8 can be used to comply with California Energy Commission High Efficacy LED light source requirements.

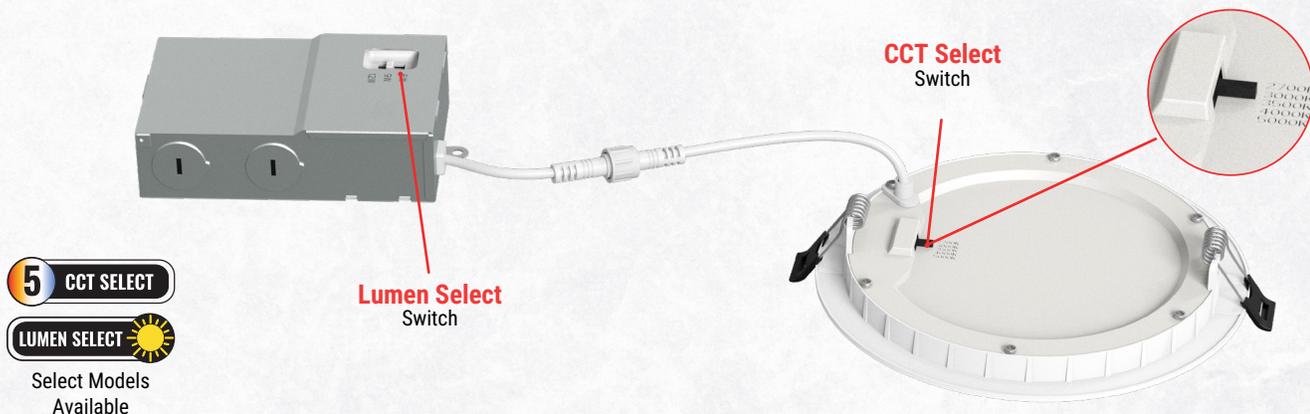

5 CCT SELECT

LUMEN SELECT 

Select Models Available

Available in three size options



6-inch



4-inch



3-inch

5 CCT SELECT

CANLESS DESIGN
NO HOUSING NEEDED

DIMMABLE

90 CRI

Ambient operating temperature
-4°F - 113°F

50,000hrs LIFETIME

Wet Location

IC RATED

120V INPUT VOLTAGE

120° BEAM ANGLE

IP65
IP Rating

CCT Select Switch
2700K/3000K/3500K/
4000K/5000K




Spring Clips
for fast & easy install



Smooth trim style

Ultra-thin design
for low clearance spaces

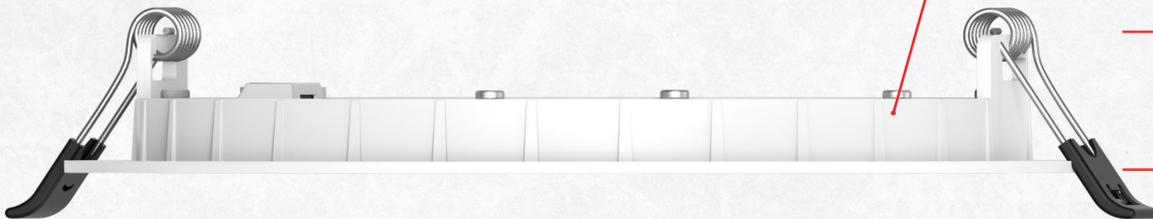

0.50"

LED RECESSED DOWNLIGHT

CCT SELECT



RoHS



FEATURES

- **Field CCT Select Technology** - choose from five color temperatures at installation
- **Durable construction** - aluminum housing with integrated heatsink and polycarbonate lens
- **Quick & Easy Install** - includes Spring clips and E26 adapter for fast setup
- **90 CRI** - delivers exceptional color quality providing rich vibrant colors
- **Airtight & Type IC Rated** - Rated for use in insulated and non-insulated ceilings and airtight per ASTM-E283
- **CA Compliant** - T20 and T24/JA8 can be used to comply with California Energy Commission High Efficacy LED light source

Available in
two trim styles:

Smooth



Baffle



Available in
two size options:

6-inch



4-inch



5 CCT SELECT

DIMMABLE

90
CRI

Ambient operating
temperature
-4°F - 113°F

50,000hrs
LIFETIME

Wet Location

120V
INPUT
VOLTAGE

100°
BEAM ANGLE

IC
RATED

AT
RATED


CCT Select Switch
2700K/3000K/3500K/
4000K/5000K



Quick Connects
provide ease of connection
and fast installation

E26 adapter base

Spring Clips

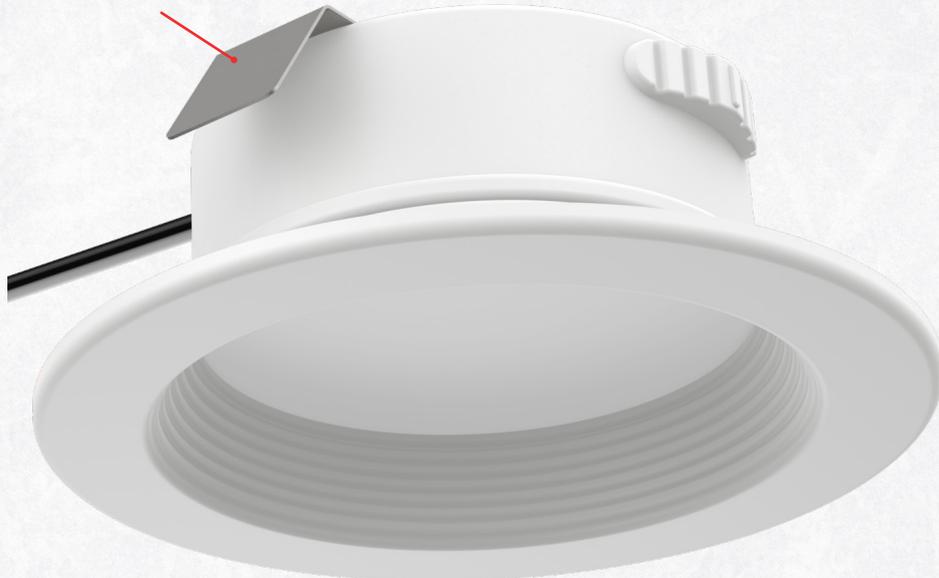

LED DISK LIGHT

CCT SELECT




RoHS



FEATURES



- **Field CCT Select Technology** - choose from five color temperatures at installation
- **90 CRI** - delivers exceptional color quality providing rich vibrant colors
- **Type IC Rated** - Rated for use in insulated and non-insulated ceilings
- **CA Compliant** - T20 and T24/JA8 can be used to comply with California Energy Commission High Efficacy LED light source

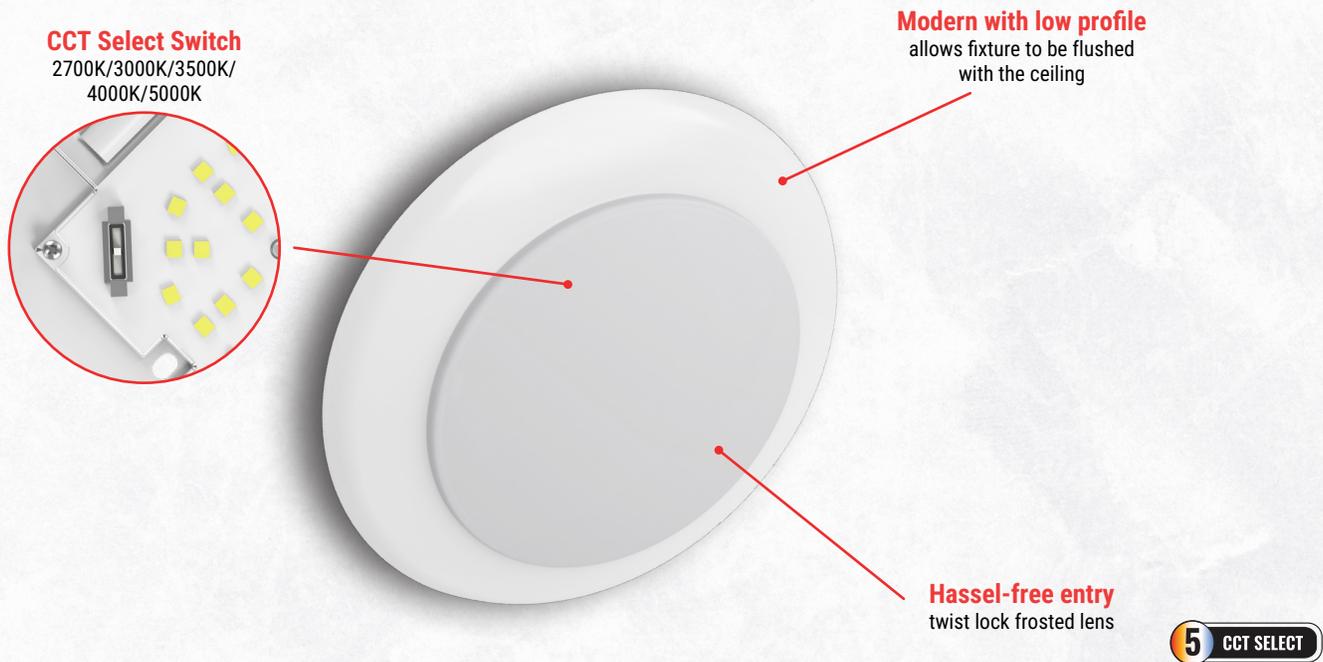

AVAILABLE IN TWO SIZE OPTIONS

6-inch

4-inch



LED DOWNLIGHTS

SPECIFICATIONS

RECESSED DOWNLIGHT

ITEM NUMBER	SIZE	INPUT VOLTAGE/AMPS	WATTAGE SELECT	LUMENS (LM) AT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
				2700K	3000K	3500K	4000K	5000K		
RTK4S-10-CS	4"	120V / 0.1A	10W	820	870	920	920	870	2700K/3000K/3500K /4000K/5000K	65W
RTK4B-10-CS										
RTK6S-15-CS	6"	120V / 0.15A	15W	1,230	1,340	1,400	1,400	1,340		75W
RTK6B-15-CS										



Spec Sheet



Install Sheet

DISK LIGHT

ITEM NUMBER	SIZE	INPUT VOLTAGE/AMPS	WATTAGE SELECT	LUMENS (LM) SELECT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
				2700K	3000K	3500K	4000K	5000K		
DL4-10-CS	4"	120V / 0.1A	10W	820	830	900	850	830	2700K/3000K/3500K /4000K/5000K	65W
DL6-15-CS	6"	120V / 0.15A	15W	1,230	1,250	1,350	1,300	1,250		75W



Spec Sheet




Install Sheet

LED DOWNLIGHTS


ACCESSORIES

WAFER DOWNLIGHTS


4" FRAME KIT

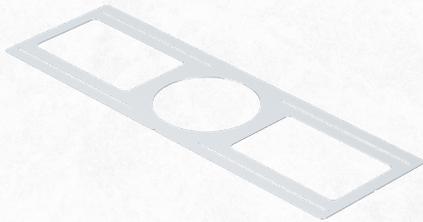


6" FRAME KIT

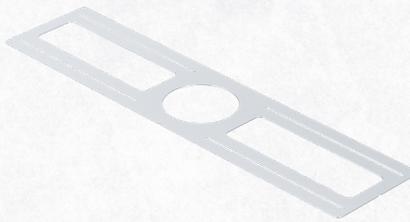

4", 6", 8" FRAME KIT

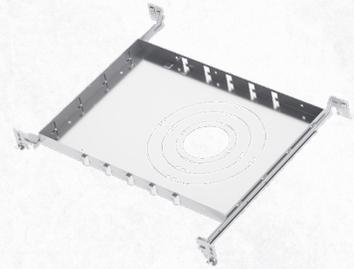


UNIVERSAL FRAME KIT

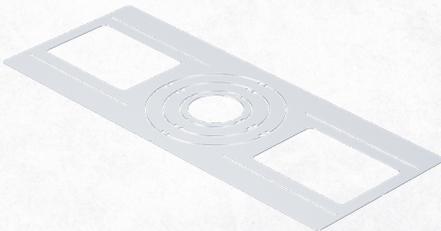

EM BATTERY BACKUP KIT 12W



10FT CABLE KIT

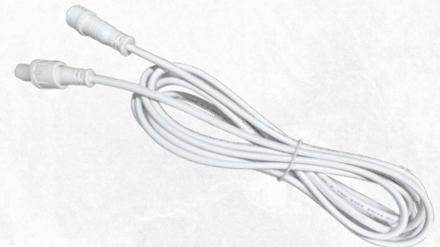

ACCESSORY ORDER INFORMATION:

ITEM NUMBER	ITEM UPC	DESCRIPTION	MASTER PACK QTY
WL4-FRAME	837654141069	4" Frame Kit	48
WL6-FRAME	837654141076	6" Frame Kit	48
WL468-FRAME-NB	837654141052	4", 6", 8" Frame Kit with Nail Bar Hanger	12
WL3468-FRAME	837654141083	Universal Frame Kit	48
WL-EM-12W	837654141090	EM Battery Backup Kit 12W	20
WL-CABLE-10FT	837654141106	10FT Cable Kit	100

LED DOWNLIGHTS

SPECIFICATIONS

WAFER DOWNLIGHTS

CCT & LUMEN SELECT:

ITEM NUMBER	SIZE	INPUT VOLTAGE/AMPS	WATTAGE SELECT	LUMENS (LM) SELECT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
				2700K	3000K	3500K	4000K	5000K		
WLR4-10-CLS	4"	120V / 0.1A	6W	500	510	525	530	515	2700K/3000K/3500K /4000K/5000K	40W
			8W	660	680	690	710	680		50W
			10W	830	850	880	900	870		65W
WLR6-13-CLS	6"	120V / 0.15A	7W	590	615	630	630	610		55W
			9W	750	780	800	810	790		60W
			12.5W	1,030	1,080	1,100	1,130	1,090		75W



Spec Sheet



Install Sheet

CCT SELECT:



Spec Sheet



Install Sheet




ITEM NUMBER	SIZE	INPUT VOLTAGE/AMPS	WATTAGE SELECT	LUMENS (LM) SELECT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
				2700K	3000K	3500K	4000K	5000K		
WLR3-7-CS	3"	120V / 0.07A	7W	574	580	595	590	580	2700K/3000K/3500K /4000K/5000K	50W
WLR4-9-CS	4"	120V / 0.10A	9W	740	755	785	790	760		65W
WLR4-10-CS	4"	120V / 0.10A	10W	920	955	985	1000	950		75W
WLR6-12-CS	6"	120V/ 0.15A	12W	1000	1060	1080	1100	1070		75W
WLR6-18-CS	6"	120V / 0.18A	18W	1500	1530	1580	1600	1570		100W



ELEVATE

LIGHTING SOLUTIONS

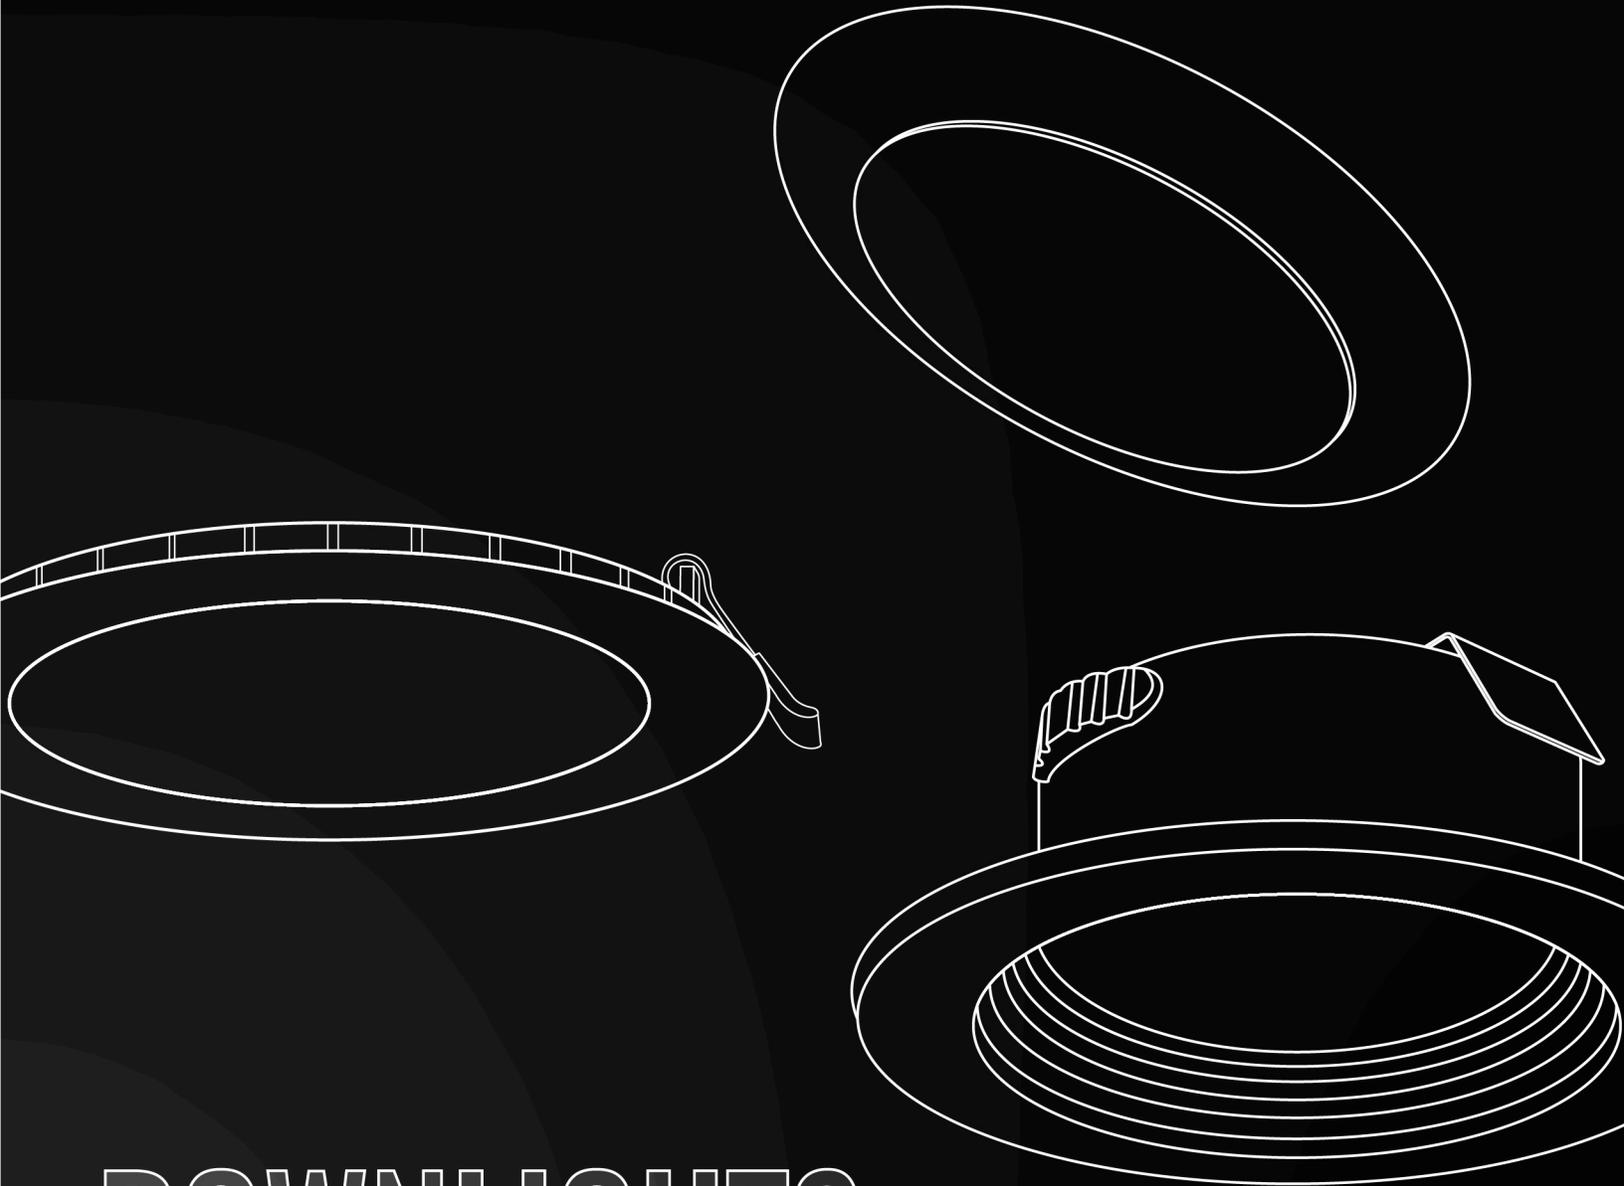

DOWNLIGHTS