

INSTALLATION INSTRUCTIONS

4&6 INCH ROUND LED DISK LIGHT

5 YEAR LIMITED PRODUCT WARRANTY

Visit www.els-led.com for warranty for details
For support contact support@els-led.com

Model	Specification	Color	CCT	Power(W)	Diameter	Beam angle	Input voltage	Lumens @ 4000K	CRI
DL4-10-CS	Disk 4 inch	5CCT adjustable	2700K 3000K 3500K	10W	Ø5.98 inch	120°	120VAC	850	>90
DL6-15-CS	Disk 6 inch		4000K 5000K	15W	Ø7.32 inch	120°	120VAC	1300	>90



WARNING

- Make all electrical and ground connections in accordance with local codes or the National Electrical Code. If you are not familiar with these codes and requirements, consult a qualified electrician. This Professional should be familiar with the construction and operation of this product and hazards involved. Failure to do so may result in serious personal injury.
- To reduce the risk of fire, electric shock, personal injury, or property damage, please read and follow all safety instructions. If you do not understand these instructions or if any additional information is required, contact your local Elevate Lighting Solutions representative. Retain these instructions for maintenance reference.
- Do not exceed the allowed supply voltage marked on the luminaire label information.
- Disconnect power at the circuit breaker panel before any installation.



CAUTION:

- Do not expose wire to any sharp objects such as sheet metal to prevent wiring damage or abrasion.
- While the light is on, please avoid direct eye exposure.
- Combustible material should be kept away from fixture/LENS.
- Do not make or alter any open holes in any enclosure or any electrical component during installation.
- Do not use when the enclosure is damaged or broken in any way.
- Do not alter, relocate or remove wiring, lamp holder power supply or any other electrical component.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS!

SAVE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION

General Safety & Product Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- DO NOT INSTALL DAMAGED PRODUCT
- Use fixture only in intended application
- Allow for proper ventilation and air movement around luminaire. Do not exceed maximum ambient operating temperature
- Recycling information on LED Products please visit WWW.EPA.GOV
- These instructions may not cover all variations in equipment, application, operation and maintenance. Should further information be required please contact support@els-led.com
- Fixture components are not serviceable. In the event of product failure please refer to product warranty guidelines at www.els-led.com



ELEVATE
LIGHTING SOLUTIONS

1000 Commerce Center Dr, Elkton MD 21921


els-led.com (718).338.1851 Fax: (718).228.1851

orders@els-led.com

[Support@ELS-LED.com](mailto:support@ELS-LED.com)

PACKAGE CONTENTS


A

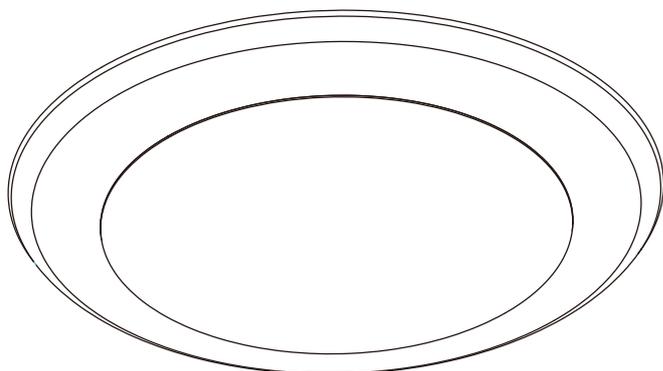

B



C

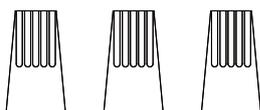

PART	DESCRIPTION	QUANTITY
A	4" or 6" disk light	1
B	Mounting screws	2
C	Wire nut	3

PREPARATION

Before beginning assembly, installation, or operation of product, make sure **all** parts are present.

Compare parts with package and hardware contents list on page 1. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Ladder, safety glasses


Estimated assembly time: 15-20 minutes per fixture

INSTALLATION INSTRUCTIONS

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation, do not permit power cord or housing to contact any surface having a sharp edge, to do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- This fixture is rated for 120V AC operation, the installer must determine whether supply power is appropriate prior to installation.
- For installation direct to the ceiling via 4" J box octagonal junction box, see Steps 1-3.


4" disk light

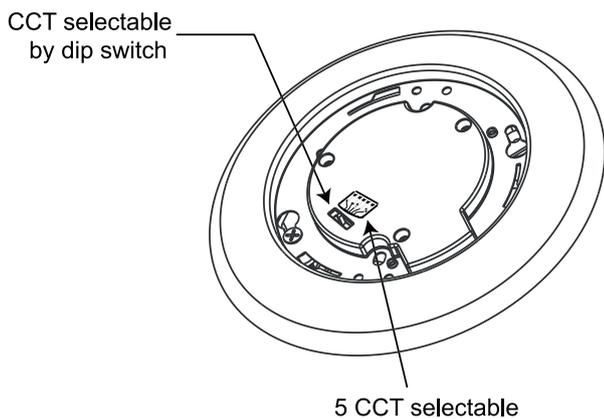

Note:

Toggle the dip switch on the back of the disc light (A) to select the correlated color temperature (CCT) prior to installation.


6" disk light

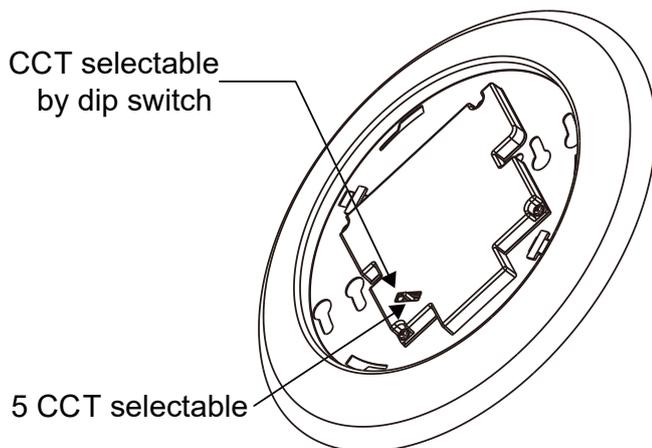


Note:

Toggle the dip switch on the back of the disc light (A) to select the correlated color temperature (CCT) prior to installation.


FOR SURFACE MOUNTING

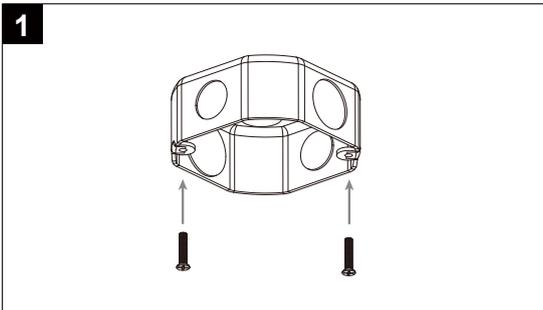

1. Insert the included mounting screws into the junction box. Fixtures are compatible with 2.75", 3.5" and 4" j-boxes. The 4" fixture requires the included mounting bracket for 3.5" and 4" j-boxes.

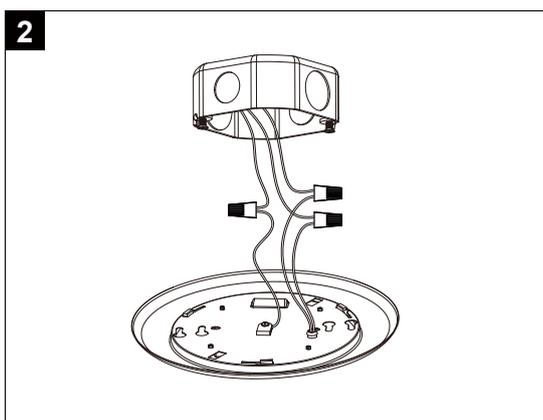

2. Use included 4-port connectors to connect the wires. Ensure the copper ground is secure. Arrange the wires into the back of the junction box.

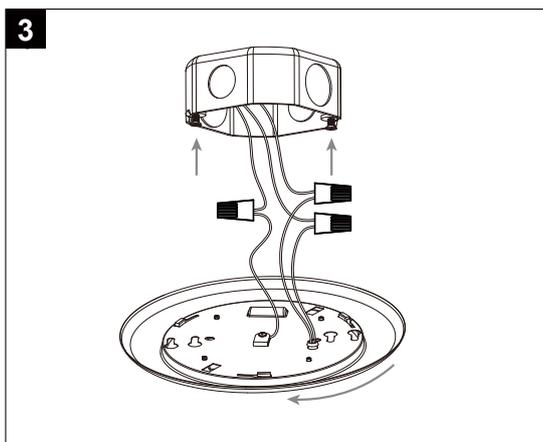

3. Align the holes on the fixture with the mounting screws. Attach the fixture to the junction box by twisting clockwise until it locks into place.