


INSTALLATION INSTRUCTIONS

EMERGENCY LIGHT - 2 HEAD

EML2-2W-WH

5 YEAR LIMITED PRODUCT WARRANTY

Visit www.els-led.com for warranty for details
For support contact support@els-led.com

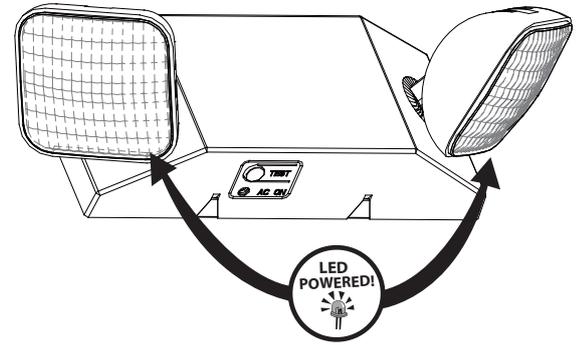

WARNING

- Make all electrical and ground connections in accordance with local codes or the National Electrical Code. If you are not familiar with these codes and requirements, consult a qualified electrician. This Professional should be familiar with the construction and operation of this product and hazards involved. Failure to do so may result in serious personal injury.
- To reduce the risk of fire, electric shock, personal injury, or property damage, please read and follow all safety instructions. If you do not understand these instructions or if any additional information is required, contact your local Elevate Lighting representative. Retain these instructions for maintenance reference.
- Do not exceed the allowed supply voltage marked on the luminaire label information.
- Disconnect power at the circuit breaker panel before any installation.



CAUTION:

- Do not expose wire to any sharp objects such as sheet metal to prevent wiring damage or abrasion.
- While the light is on, please avoid direct eye exposure.
- Combustible material should be kept away from fixture/LENS.
- Do not make or alter any open holes in any enclosure or any electrical component during installation.
- Do not use when the enclosure is damaged or broken in any way.
- Do not alter, relocate or remove wiring, lamp holder power supply or any other electrical component.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS!

SAVE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION

General Safety & Product Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- DO NOT INSTALL DAMAGED PRODUCT
- Use fixture only in intended application
- Allow for proper ventilation and air movement around luminaire. Do not exceed maximum ambient operating temperature
- Recycling information on LED Products please visit WWW.EPA.GOV
- These instructions may not cover all variations in equipment, application, operation and maintenance. Should further information be required please contact support@els-led.com
- Fixture components are not serviceable. In the event of product failure please refer to product warranty guidelines at www.els-led.com



ELEVATE
LIGHTING SOLUTIONS

1000 Commerce Center Dr, Elkton MD 21921

Support@ELS-LED.com

els-led.com (718).338.1851 Fax: (718).228.1851

orders@els-led.com

IMPORTANT :

1. Allow the battery to charge for at least 24 hours before normal operation
2. After charging press the test button. the LED lamps on fixture should operate.
3. In the event of power failure , the LED lamps will automatically operate for a minimum of 90 minutes.



Testing Requirements (Per NFPA 101)

1. Test Unit Monthly for at least 30 seconds
2. Conduct an annual test for the full 90 minutes

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

SAVE THESE INSTRUCTIONS



FLEXIBLE CONDUIT ONLY

INSTALLATION (J-BOX MOUNTING)

1. Feed fixture leads through the back plate and connect to AC power supply (Fig A). For 120V use black and white wires and for 277V, use red and white wires.
2. Attach back plate to J-Box and secure with screws.
3. Complete the battery connection. (Fig. B)
4. Align snaps and push housing directly onto the back plate (Fig. C). Apply continuous AC power and press "TEST" button to check light.

INSTALLATION (CONDUIT)

1. Secure back plate to wall surface . Route wires through hole in conduit flange and make conduit connection. For 120V, use black and white wires and for 277V, use red and white wires.
2. Complete the battery connection (Fig. B).
3. Align snaps and push housing directly onto the back plate (Fig. C). Apply continuous AC power and press "TEST" button to check light.

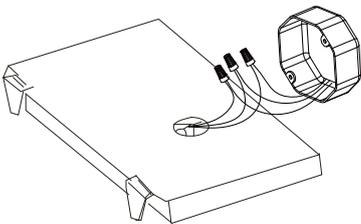


Fig.A (J-Box)

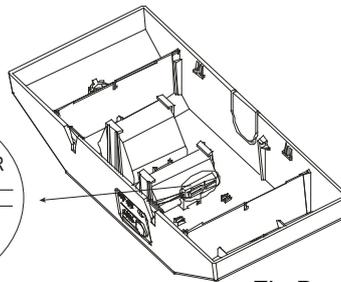



Fig.B

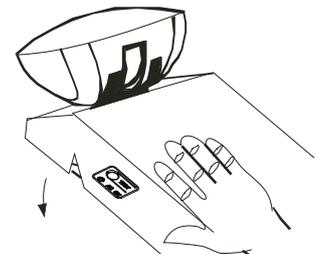


Fig.C

WARNING:

Unused wires must be capped using enclosed wire nuts.

WIRING DIAGRAM

Note:

Unused input lead must be properly insulated with wire nut or other approved method.

