

DISK LIGHT

CCT SELECT



PROJECT:
#ITEM:
DATE:
PREPARED BY:

FEATURES

- **Field CCT Select Technology** choose from five color temperatures at installation
- **Hassel-free** twist lock frosted lens provides tool-less entry
- **Sleek low profile design** allows fixture to be dome with ceiling
- **Type IC Rated:** Rated for use in insulated and non-insulated ceilings
- **CA Compliant:** T24/ JA8 can be used to comply with California Energy Commission High Efficacy LED light source requirements.
- **Versatile Mounting** installs on ceiling or surfaces using standard and pancake style 4" junction boxes
- **Closet Rated** suitable for use in clothes closets when installed in accordance with NFPA 70, NEC 410.16(A)(3) and 410.16(C)(5)

PRODUCT CERTIFICATIONS



RoHS



PRODUCT FEATURES



ORDERING INFORMATION

DL4-10-CS

PRODUCT FAMILY	SIZE	WATTAGE	CCT SELECT	LUMENS
DL = DISK LIGHT	4"	10W	2700K/3000K/3500K/4000K/5000K	850
	6"	15W		1,300



TECHNICAL SPECIFICATIONS

ELECTRICAL

- 120V, 60Hz Input voltage
- Phase cut dimming, down to 10%
- Power Factor >0.9, THD <20%
- -4°F to 113°F ambient operating temperature
- Backlit

CONSTRUCTION

- Metal
- Smooth trim style
- Polycarbonate lens

INSTALLATION

- Remodel or new construction applications
- Twist-lock lens provides tool-less entry
- Ceiling or surface mount
- Compatible with standard and pancake 4" junction box
- Suitable for use in clothes closets when installed in accordance with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

OPTICAL

- 90 CRI for exceptional color rendering
- 110° beam angle
- SDCM <5
- Lifetime (L70) 50,000 hours

COMPLIANCE

- ETL-Listed
- ENERGYSTAR
- FCC Part 15
- CEC T24/JA8 Compliant
- Wet Location listed
- Type IC Rated for use with insulated and non insulated ceilings

WARRANTY

- 5 year warranty

PERFORMANCE DATA

ITEM NUMBER	SIZE	INPUT VOLTAGE/AMPS	WATTAGE SELECT	LUMENS (LM) AT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
				2700K	3000K	3500K	4000K	5000K		
DL4-10-CS	4"	120V / 0.1A	10W	820	830	900	850	830	2700K/3000K/3500K /4000K/5000K	65W
DL6-15-CS	6"	120V / 0.15A	15W	1,230	1,250	1,350	1,300	1,250		75W

SHIPPING DATA


ITEM NUMBER	ITEM UPC	MASTER PACK QTY	PALLET DIMENSION	PALLET QTY (PCS)
DL4-10-CS	840526243365	30	48" x 40" x 75.6"	1,800
DL6-15-CS	840526243372	24		1,152

*Pallet size and quantities may vary




PRODUCT DIMENSIONS

DL4-10-CS

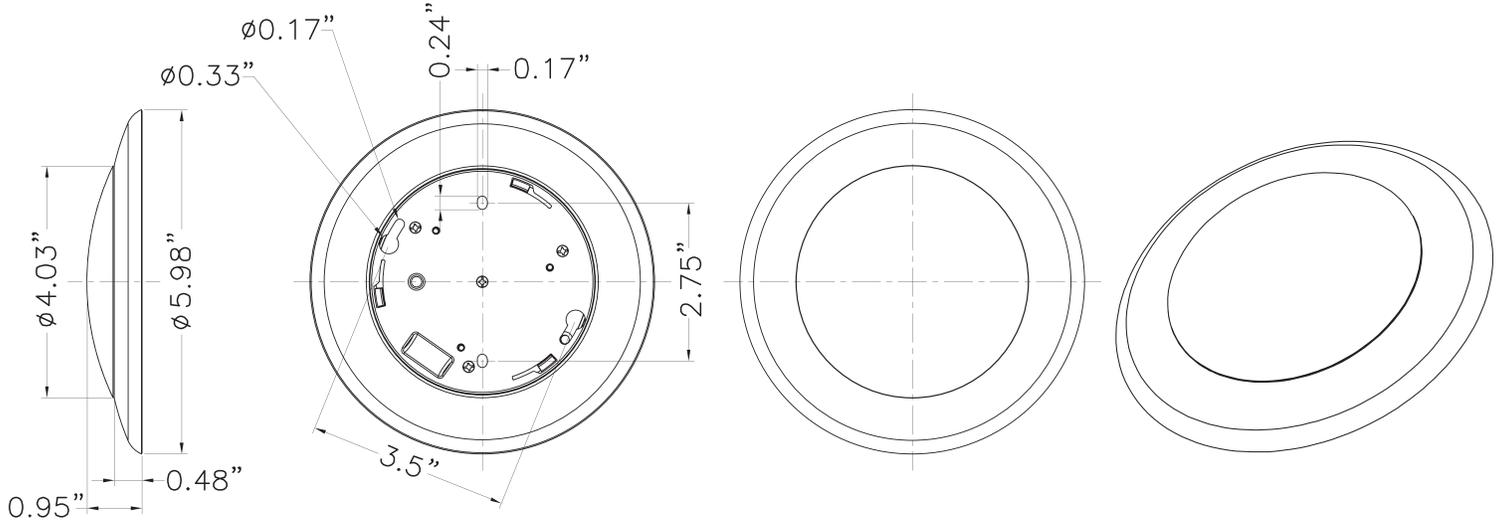

DL6-15-CS

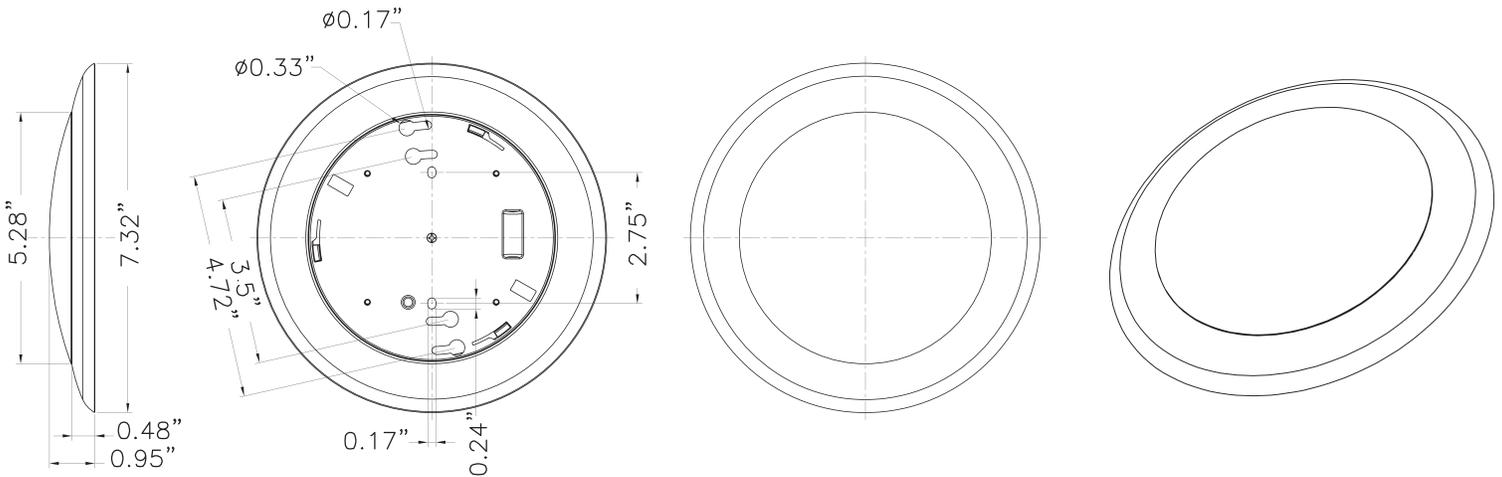

Notes:

Specifications subject to change without notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading.