

# RECESSED / RETROFIT DOWNLIGHTS

## CCT SELECT



PROJECT:  
#ITEM:  
DATE:  
PREPARED BY:

### FEATURES

- **Field CCT Select Technology** choose from five color temperatures at installation
- **Durable construction** - aluminum housing with integrated heatsink and polycarbonate lens
- **Quick & Easy Install** - includes spring clips and E26 adapter for fast setup
- **AT & IC Rated:** Rated for use in insulated and non-insulated ceilings and airtight per ASTM-E283
- **CA Compliant:** T20 and T24/JA8 can be used to comply with California Energy Commission High Efficacy LED light source
- **Multiple Options-** available in 4" & 6" size with smooth or baffle trim styles

### PRODUCT CERTIFICATIONS



RoHS



### PRODUCT FEATURES



### ORDERING INFORMATION

RTK4S-10-CS

PRODUCT FAMILY	SIZE	TRIM STYLE	WATTAGE	CCT SELECT	LUMENS
RTK=RETROFIT TRIM KIT	4"	SMOOTH	10W	2700K/3000K/3500K/4000K/5000K	920
	6"	BAFFLE	15W		1,400



## TECHNICAL SPECIFICATIONS

### ELECTRICAL

- 120V, 60Hz Input voltage
- Phase cut dimming, down to 10%
- Power Factor >0.9, THD <20%
- -4°F to 113°F ambient operating temperature
- Backlit

### CONSTRUCTION

- Aluminum alloy frame with white finish
- Smooth and baffle trim styles
- Polycarbonate lens
- E26 medium base included
- Quick connects for quick & fast install

### INSTALLATION

- Remodel or new construction applications
- Fits most 4" and 6" recessed housings

### OPTICAL

- 90 CRI for exceptional color rendering
- 100° beam angle
- SDCM <5
- Lifetime (L70) 50,000 hours

### COMPLIANCE

- ETL-Listed
- ENERGYSTAR
- FCC Part 15
- CEC T20 and T24/JA8 Compliant
- Wet Location listed
- Type IC Rated for use with insulated and non-insulated ceilings
- Airtight per ASTM-E283

### WARRANTY

- 5 year warranty

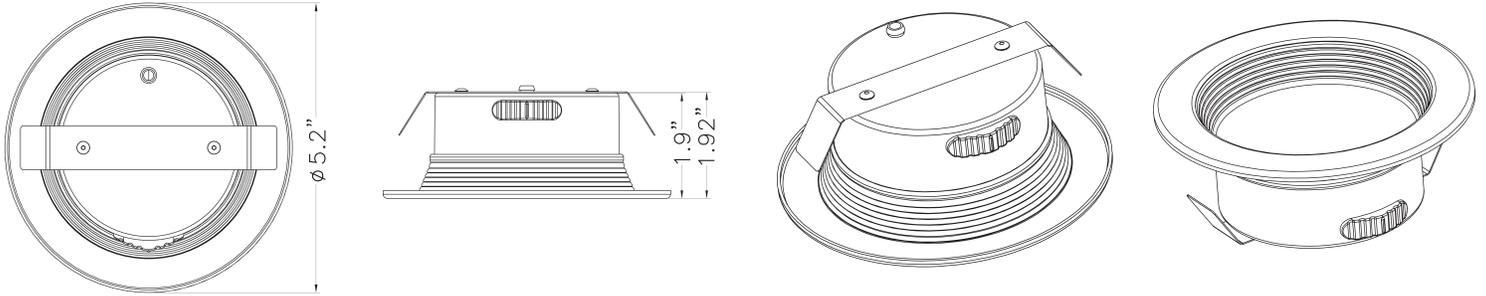
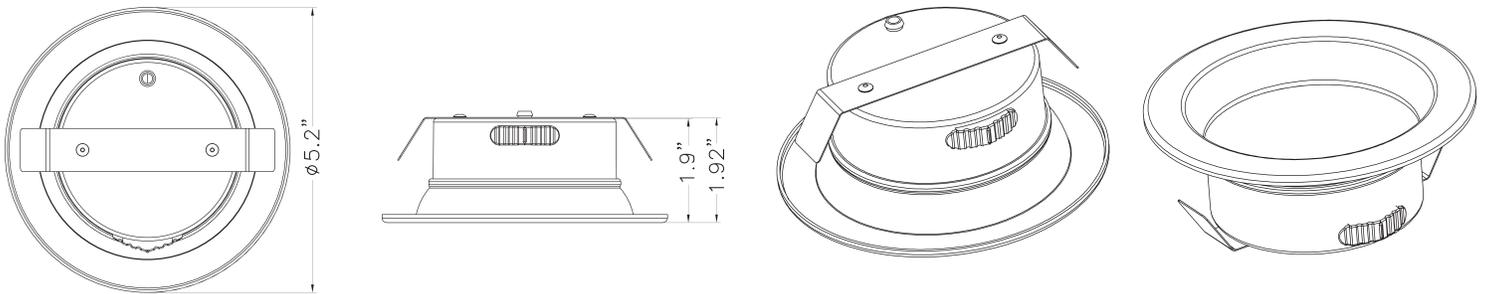
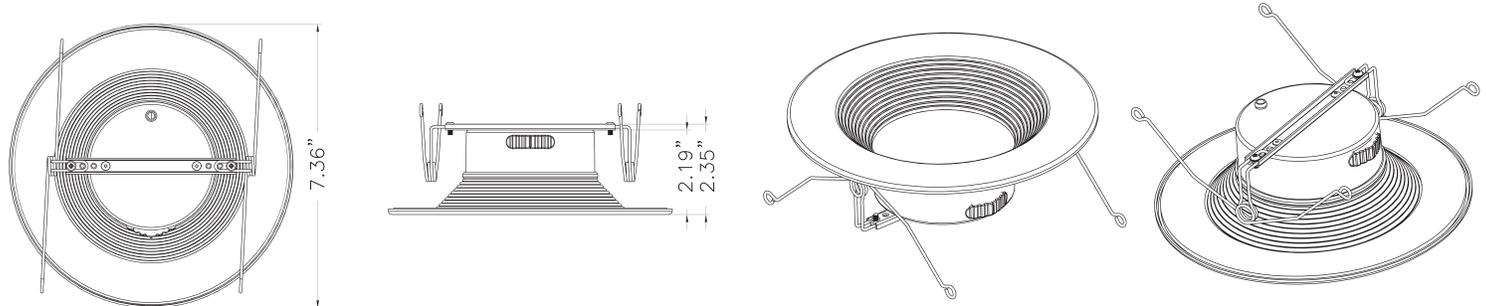
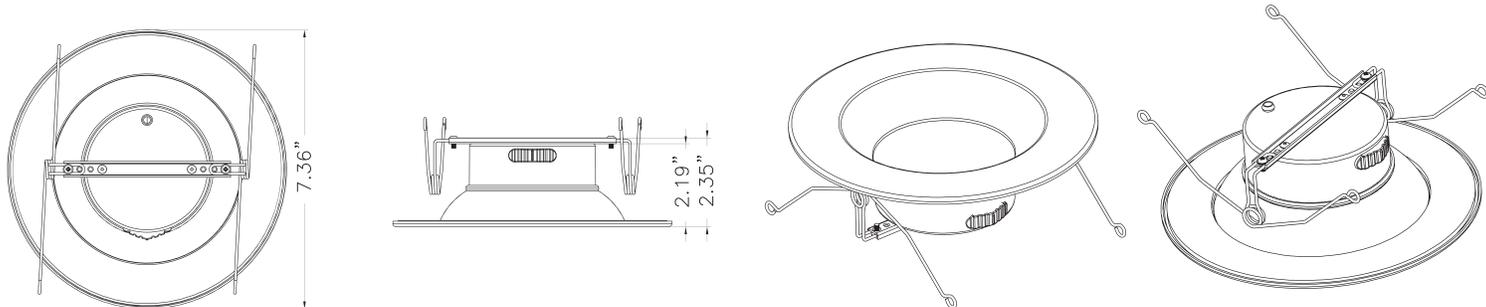
## PERFORMANCE DATA

ITEM NUMBER	SIZE	TRIM STYLE	INPUT VOLTAGE/AMPS	WATTAGE	LUMENS (LM) AT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
					2700K	3000K	3500K	4000K	5000K		
RTK4S-10-CS	4"	SMOOTH	120V / 0.1A	10W	830	870	920	920	870	2700K/3000K/3500K /4000K/5000K	65W
RTK4B-10-CS		BAFFLE									
RTK6S-15-CS	6"	SMOOTH	120V / 0.15A	15W	1,250	1,340	1,400	1,400	1,340		75W
RTK6B-15-CS		BAFFLE									

## SHIPPING DATA

ITEM NUMBER	ITEM UPC	MASTER PACK QTY	PALLET DIMENSION	PALLET QTY (PCS)
RTK4S-10-CS	840526243129	36	48"x 40"x 75.6"	1,152
RTK4B-10-CS	840526243631	36		1,152
RTK6S-15-CS	840526243662	24		576
RTK6B-15-CS	840526243174	24		576

\*Pallet size and quantities may vary

**PRODUCT DIMENSIONS**
**RTK4B-10-CS**

**RTK4S-10-CS**

**RTK6B-15-CS**

**RTK6S-15-CS**

**Notes:**

Specifications subject to change without notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading.