

# WAFER DOWNLIGHT

## CCT & LUMEN SELECT

PROJECT:  
#ITEM:  
DATE:  
PREPARED BY:



### FEATURES

- **Field CCT & Lumen Select Technology** choose from five color temperatures and 3 wattages at installation
- **Canless Design**- no recessed housing required, features a remote J-Box
- **Ultra thin** design provides flexibility to fit in shallow ceilings
- **Type IC Rated:** Rated for use in insulated and non-insulated ceilings
- **CA Compliant:** T24/ JA8 can be used to comply with California Energy Commission High Efficacy LED light source requirements.
- **Multiple Sizes-** available in 4" and 6" size with smooth white trim

### PRODUCT CERTIFICATIONS



RoHS



### PRODUCT FEATURES



### ORDERING INFORMATION

WLR4-10-CS

PRODUCT FAMILY	SIZE	WATTAGE SELECT	CCT SELECT	LUMENS
WLR = WAFER DOWNLIGHT	4"	6/8/10W	2700K/3000K/3500K/4000K/5000K	530/710/900
	6"	7/9/12.5W		630/810/1,130



## TECHNICAL SPECIFICATIONS

### ELECTRICAL

- 120V, 60Hz Input voltage
- Phase cut dimming, down to 10%
- Power Factor >0.9, THD <20%
- -4°F to 113°F ambient operating temperature
- Edge-lit

### CONSTRUCTION

- Aluminum alloy frame with white finish
- Smooth trim style
- Polycarbonate lens
- Remote driver box
- Quick connects for quick & fast install

### INSTALLATION

- For remodel or new construction applications
- Remote J-box- no housing required
- Up to 15FT ceilings
- Frame kits & cable kits sold separately

### OPTICAL

- 90 CRI for exceptional color rendering
- 120° beam angle
- SDCM <5
- Lifetime (L70) 50,000 hours

### COMPLIANCE

- ETL-Listed
- ENERGYSTAR
- FCC Part 15
- CEC T24/JA8 Compliant
- Wet Location listed
- Type IC Rated for use with insulated and non-insulated ceilings

### WARRANTY

- 5 year warranty

## PERFORMANCE DATA

ITEM NUMBER	SIZE	TRIM STYLE	INPUT VOLTAGE / AMPS	WATTAGE SELECT	LUMENS (LM) AT					CCT SELECT	INCANDESCENT REPLACEMENT WATTAGE
					2700K	3000K	3500K	4000K	5000K		
WLR4-10-CLS	4"	SMOOTH	120V / 0.1A	6W	500	510	525	530	515	2700K/3000K/3500K /4000K/5000K	40W
				8W	660	680	690	710	680		50W
				10W	830	850	880	900	870		65W
WLR6-13-CLS	6"		120V / 0.15A	7W	590	615	630	630	610		55W
				9W	750	780	800	810	790		60W
				12.5W	1,030	1,080	1,100	1,130	1,090		75W

## SHIPPING DATA


ITEM NUMBER	ITEM UPC	MASTER PACK QTY	PALLET DIMENSION	PALLET QTY (PCS)
WLR4-10-CLS	840526243761	24	48" x 40" x 75.6"	864
WLR6-13-CLS	840526243778			

\*Pallet size and quantities may vary




**PRODUCT DIMENSIONS**

**WLR4-CLS**

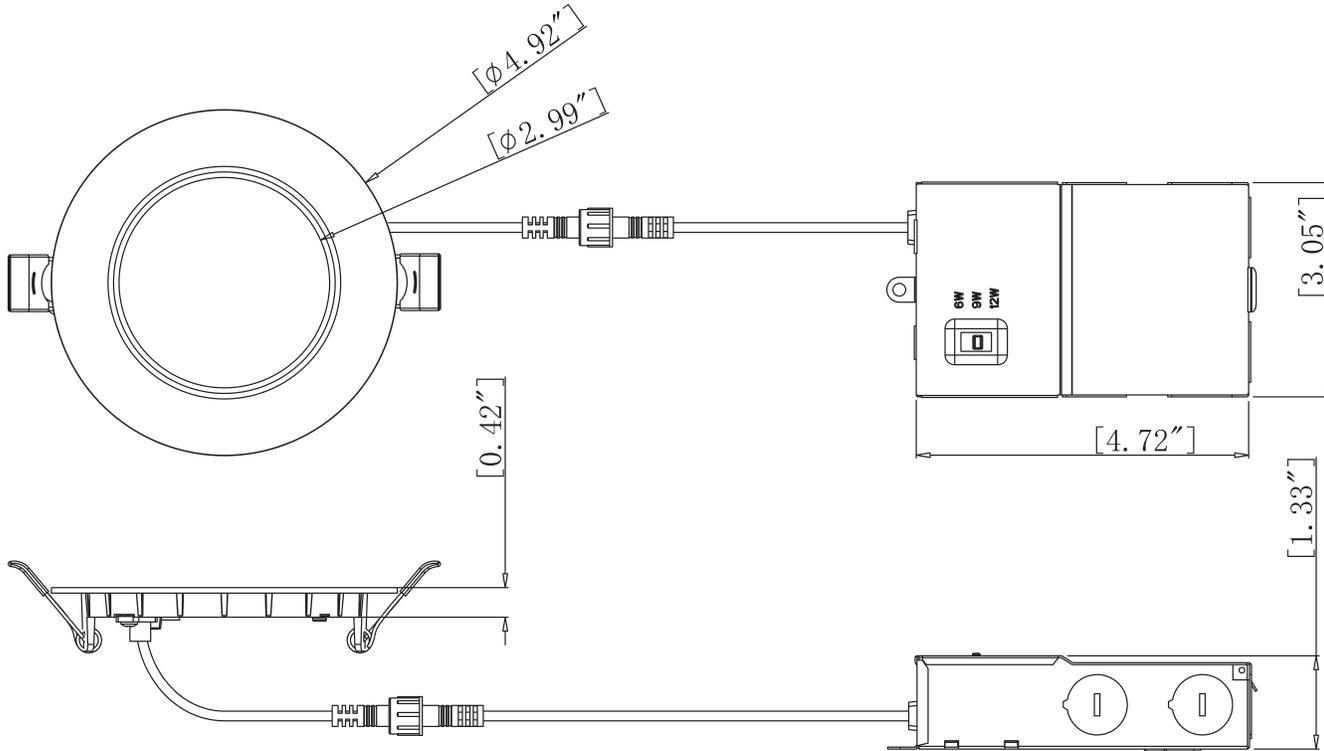

**WLR6-CLS**

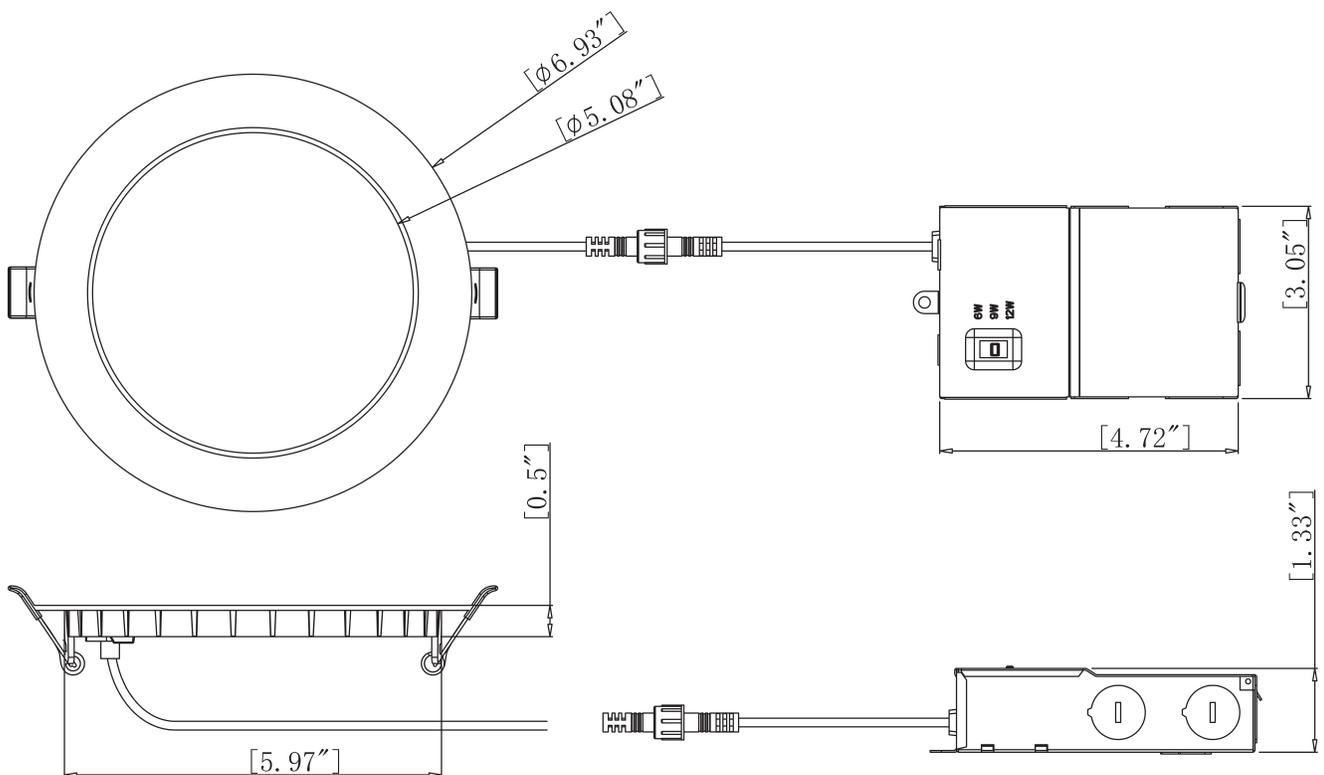






**ACCESSORIES (SOLD SEPARATELY)**

**4" FRAME KIT**



WL4-FRAME

**6" FRAME KIT**

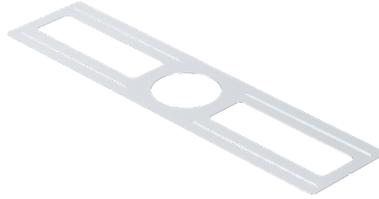

WL6-FRAME

**4", 6", 8" FRAME KIT**



WL468-FRAME-NB

**UNIVERSAL FRAME KIT**



WL3468-FRAME

**EM BATTERY BACKUP KIT 12W**



WL-EM-12W

**ACCESSORY ORDER INFORMATION**

ITEM NUMBER	ITEM UPC	DESCRIPTION	MASTER PACK QTY
WL4-FRAME	840526242962	4" Frame Kit	48
WL6-FRAME	840526243730	6" Frame Kit	48
WL468-FRAME-NB	840526243723	4", 6", 8" Frame Kit with Nail Bar Hanger	12
WL3468-FRAME	840526243716	Universal Frame Kit	48
WL-EM-12W	840526243754	EM Battery Backup Kit 12W	20

**Notes:**

Specifications subject to change without notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading.