

EMERGENCY LIGHT



PROJECT:
 #ITEM:
 DATE:
 PREPARED BY:

FEATURES

- Meets **NFPA70, NFPA 101, UL924, NEC/OSHA** Standards
- **90-minute battery backup** for reliable operation during power outages
- **High impact flame retardant** thermoplastic housing
- **Dual adjustable lamp heads** precise light coverage in any space
- **Push to test and AC indicator light** provides easy maintenance
- **Wall mount** with hardware included

PRODUCT CERTIFICATIONS



RoHS

PRODUCT FEATURES



ORDERING INFORMATION

EML2-2W-WH

PRODUCT FAMILY	NUMBER OF LAMP HEADS	WATTAGE	FINISH
EML = EMERGENCY LIGHT	2	2W	WHITE



TECHNICAL SPECIFICATIONS

ELECTRICAL

- Dual Voltage 120/277V
- 32°F – 104 °F ambient operating temperature

OPTICAL

- 70 CRI
- 400 recycle times
- 6500K CCT

WARRANTY

- 2 year warranty


CONSTRUCTION

- High impact flame retardant thermoplastic housing
- White Finish
- 2 adjustable lamp heads
- Universal J-box pattern (J-box not included)
- Push to test button
- AC indicator light

INSTALLATION

- Wall mount, hardware included

SPACING GUIDELINES

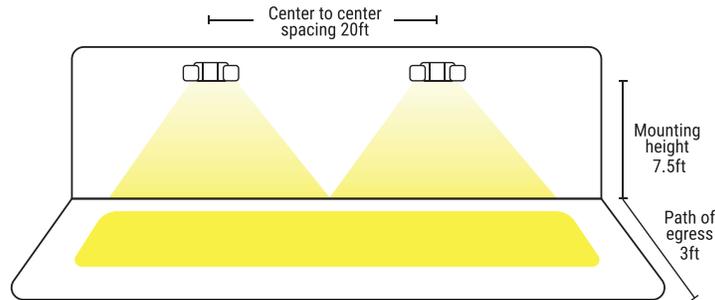

Compliant NFPA 101 requires 1.0 foot-candle average and 0.1 foot-candle minimum with 40:1 max/min ratio

COMPLIANCE

- UL
- FCC Part 15
- Suitable for damp locations

EMERGENCY BATTERY BACKUP

- Ni-Cad Battery
- 3.6V 600mAh Power Rating
- 150 lumens
- 90minute run time


PERFORMANCE DATA

ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	NUMBER OF LAMP HEADS	CA T20
EML2-2W-WH	120/277V	2.4W	150	2	YES

SHIPPING DATA

ITEM NUMBER	ITEM UPC	MASTER PACK QTY	PALLET DIMENSION	PALLET QTY (PCS)
EML2-2W-WH	840526243402	6	48x40x52.25"	270

*Pallet size and quantities may vary

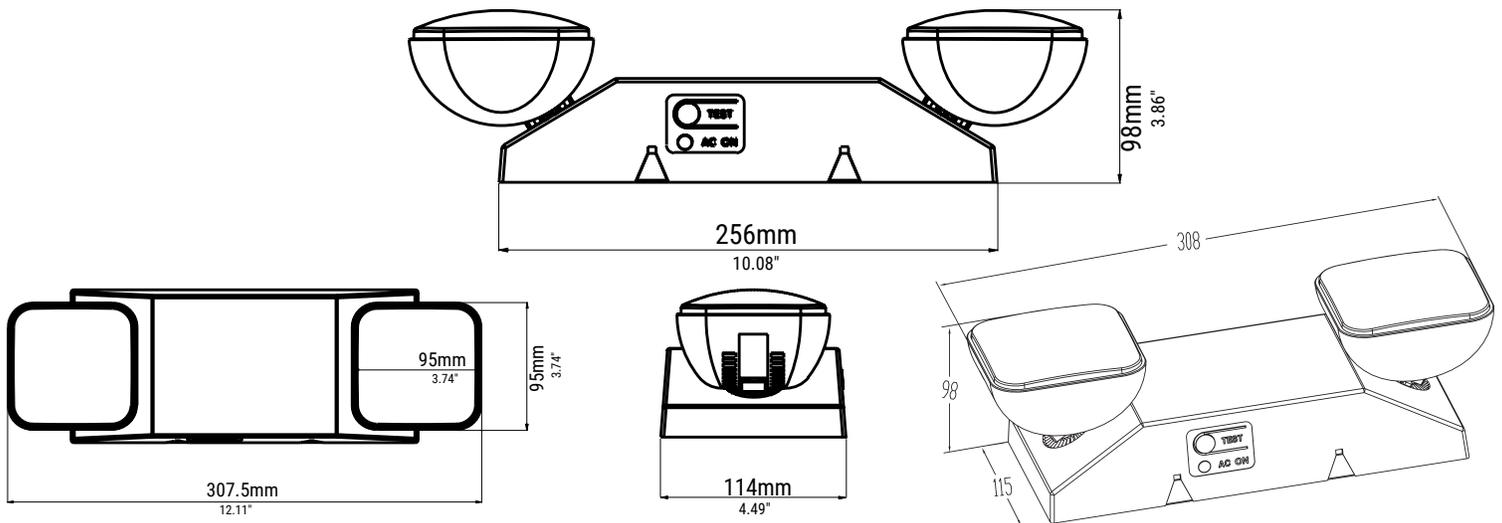

Notes:

Specifications subject to change without notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.