



ELEVATE
LIGHTING SOLUTIONS

SPRING
2026



PRODUCT

Elevate your space

CATALOG



ELEVATE

LIGHTING SOLUTIONS

ELEVATE YOUR SPACE

Our mission is to **ELEVATE** your space with our innovative, energy-efficient lighting solutions designed with top-quality and cutting-edge technology. As part of the Ammo International brand, we are committed to providing a seamless experience with top-notch customer service. We strive to become your one-stop shop for convenience delivering expectational electrical and lighting solutions for both commercial and residential construction markets.



LIGHTING SOLUTIONS THAT POWER EVERY SPACE

Discover the perfect lighting solution for any project with **ELEVATE** Lighting Solutions.

Our wide range of innovative LED products are designed for commercial, industrial, and residential applications—delivering the ideal balance of flexibility, performance and reliability. At ELEVATE Lighting Solutions, we don't just light spaces—we transform them with superior efficiency, durability, and quality. Explore our portfolio today and experience lighting solutions that **ELEVATE** every project.

TABLE OF CONTENTS

06

Flat Panels

08

Linear Strip

10

Linear High Bays

11

Round High Bays

12

High Bay Accessories

13

Linear Vapor Tight

14

Wafer Downlights

16

Wafer Downlight Accessories

17

Recessed Downlights

18

Disk Lights



ELEVATE
LIGHTING SOLUTIONS

A19 Lamp Economy

19

LED T8 Tubes Ballast Bypass

20

Temporary String Lights

22

Temporary Work Light

23

Vapor Tight Jelly Jar Fixtures

24

Emergency Light

25

Exit Sign & EM Combo Switchable

EXIT

26

NYC Emergency Light

27

NYC Approved Exit Signs

<EXIT

28


NYC Approved Exit & EM Combo

EXIT

29

FLAT PANELS

CCT & LUMEN SELECT

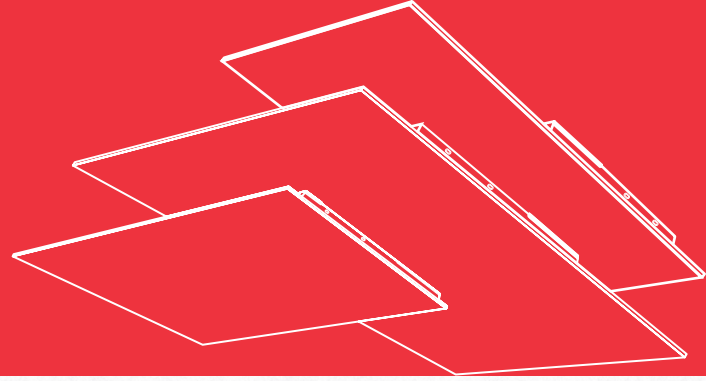

FEATURES

- Low profile back-lit design provides even uniform light distribution
- Smooth 0-10V dimming, down to 10%
- Fits standard T-grid ceilings
- Surface, suspensions and recessed mount kits sold separately
- Integrated EM battery backup option available

TYPICAL APPLICATIONS:



Offices




Education



Healthcare



Retail

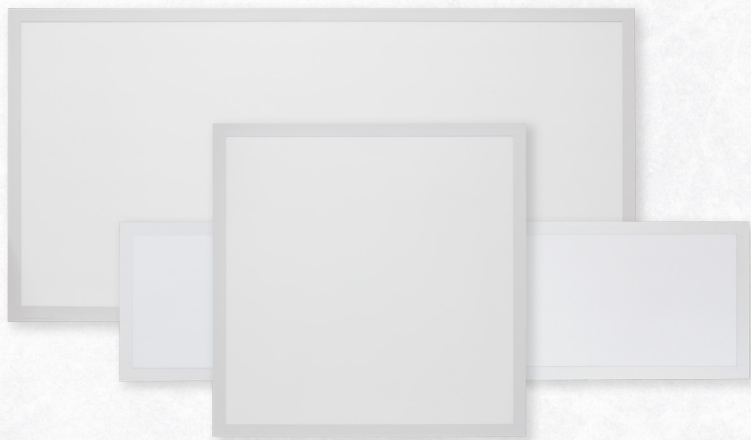


RoHS




ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	FLUORESCENT REPLACEMENT WATTAGE	DLC PRODUCT ID STANDARD
PNL14-40CLS-D PNL14-40CLS-DEM	1x4	120-277V	40W	4,800	120	3500K/4000K/5000K	2 x 32W T8	S-6YV0D1
			30W	3,580	119		2 x 32W T8 LBF	
			20W	2,360	118		2 x 32W T8 LBF	
PNL22-40CLS-D PNL22-40CLS-DEM	2x2		40W	4,851	121		2 x 32W T8	S-73LMB2
			30W	3,584	119		2 x 32W T8 LBF	
			20W	2,367	118		2 x 32W T8 LBF	
PNL24-50CLS-D PNL24-50CLS-DEM	2x4		50W	5,986	120		2 x 32W T8 HBF	S-XN0NKP
			40W	4,721	118		2 x 32W T8	
			30W	3,698	123		2 x 32W T8 LBF	


ACCESSORIES




PNL1X4-FRAMEKIT
FRAME KIT FOR 1X4 FLAT PANELS



PNL2X4-FRAMEKIT
FRAME KIT FOR 2X2 FLAT PANELS




PNL2X2-FRAMEKIT
FRAME KIT FOR 2X4 FLAT PANELS



PNL1X4-RMDWKIT
RECESSED MOUNT DRYWALL KIT FOR 1X4 FLAT PANEL



PNL2X4-RMDWKIT
RECESSED MOUNT DRYWALL KIT FOR 2X2 FLAT PANEL



PNL2X2-RMDWKIT
RECESSED MOUNT DRYWALL KIT FOR 2X4 FLAT PANEL



PNL-CABLEKIT
8FT CABLE KIT FOR FLAT PANELS

ACCESSORY ORDER INFORMATION:

ITEM NUMBER	DESCRIPTION
PNL-CABLEKIT	8FT CABLE KIT FOR FLAT PANELS
PNL1X4-FRAMEKIT	FRAME KIT FOR 1X4 FLAT PANELS
PNL2X2-FRAMEKIT	FRAME KIT FOR 2X2 FLAT PANELS
PNL2X4-FRAMEKIT	FRAME KIT FOR 2X4 FLAT PANELS
PNL1X4-RMDWKIT	RECESSED MOUNT DRYWALL KIT FOR 1X4 FLAT PANEL
PNL2X2-RMDWKIT	RECESSED MOUNT DRYWALL KIT FOR 2X2 FLAT PANEL
PNL2X4-RMDWKIT	RECESSED MOUNT DRYWALL KIT FOR 2X4 FLAT PANEL

LINEAR STRIPS

CCT & LUMEN SELECT

FEATURES

- Sleek white steel housing with frosted polycarbonate lens
- Press-to-release buttons provide toolless entry and quick setup
- Smooth 0-10V dimming down to 10%
- Surface mount ready, suspension and end-to-end kits sold separately
- Linkable for continuous row applications with end-to-end connector kit
- Controls ready models available - accessible receptacle for easy install for plug-in controls

TYPICAL APPLICATIONS:



Offices



Education



Healthcare




Retail



RoHS



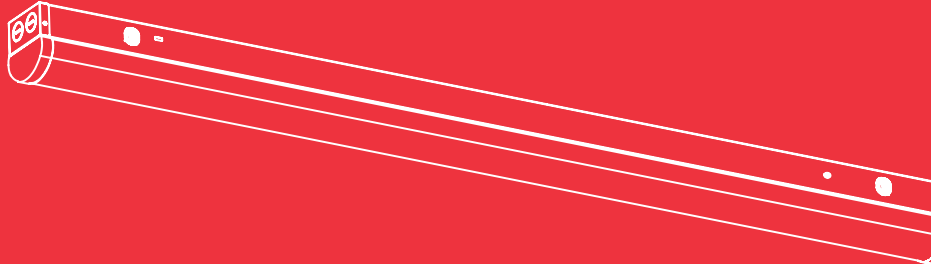

ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	CCT SELECTABLE	FLUORESCENT REPLACEMENT	DLC PRODUCT ID PREMIUM	DLC PRODUCT ID STANDARD
LS2-25CLS-D LS-25CLS-D-CR LS-25CLS-D-EM LS-25CLS-D-EMCR	2FT	120-277V	25W	3,375	3000K/3500K 4000K/5000K 6500K	2x 17W T8 HBF	S-NN7JYY	S-33Y0HW
			20W	2,800		2x 17W T8		
			15W	2,145		2x 17W T8		
LS4-40CLS-D LS4-40CLS-D-CR LS4-40CLS-D-EM LS4-40CLS-D-EMCR	4FT		40W	5,400		2x 32W T8	S-0JQ1R8	S-T69Q8T S-XPTVHR
			30W	4,200		2x 32W T8 LBF		
			20W	2,860		2x 17W T8		
LS8-80CLS-D LS8-80CLS-D-CR LS8-80CLS-D-EM	8FT		80W	10,800		F96 T12 VHO 185W	S-WTV5CD S-HB33NT	S-08XBLX
			65W	8,960		F96 T12 H0 110W		
			40W	5,720		2 x 32W T8		

ACCESSORIES



LS-CABLEKIT
CABLE KIT FOR LINEAR STRIPS



LS-E2ECONN
END-TO-END CONNECTOR KIT FOR LINEAR STRIPS



IFS06R
12V PIR MOTION SENSOR



RM51
REMOTE CONTROL FOR US WITH IPS06R

ACCESSORY ORDER INFORMATION:

MOUNTING ACCESSORIES


ITEM NUMBER	DESCRIPTION
LS-CABLEKIT	4.9FT CABLE KIT FOR LINEAR STRIPS
LS-E2ECONN	END-TO-END CONNECTOR KIT FOR LINEAR STRIPS

CONTROLS

ITEM NUMBER	DESCRIPTION
IFS06R	12V PIR MOTION SENSOR
RM51	REMOTE CONTROL FOR US WITH IPS06R

LINEAR HIGH BAY

CCT & LUMEN SELECT

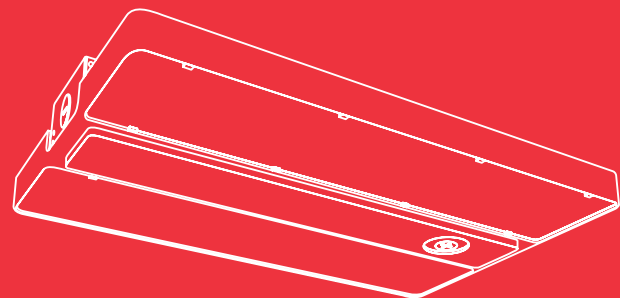

FEATURES

- Durable die-cast aluminum housing with white finish
- Controls Ready - accessible receptacle for easy install for plug-in controls
- Smooth 0-10V dimming, down to 10%
- Emergency Battery Backup model available

TYPICAL APPLICATIONS:



Warehouses



Manufacturing
Production areas



Gymnasiums



ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	HID REPLACEMENT WATTAGE	DLC PRODUCT ID PREMIUM
HBL-110CLS-CR	14"	120-277V	110W	15,946	145	3500K/4000K/5000K	300W HID	S-J485D2
			85W	12,656	149		250W HID	
			60W	9,214	154		175W HID	
HBL-175CLS-CR	18"		175W	25,849	148		500W HID	S-LTC66S
			140W	21,383	153		400W HID	
			110W	16,788	153		250W HID	
HBL-215CLS-CR			215W	32,243	150		650W HID	S-VRNZ9K
*HBL-215CLS-CR-EM			160W	24,058	150		500W HID	
			120W	18,824	157		400W HID	
HBL-320CLS-CR	23"		320W	46,407	145		1000W HID	S-925H11
			270W	39,921	148		800W HID	
			220W	33,891	154		600W HID	
HBL-420CLS-CR	46"		420W	60,476	144		1300W HID	S-2YX13H
			380W	55,149	145		1200W HID	
			320W	47,398	148		1000W HID	



RoHS



* Select models

ROUND HIGH BAY

CCT & LUMEN SELECT

FEATURES

- Die-cast aluminum housing with polycarbonate lens
- Controls Ready - accessible receptacle for easy install for plug-in controls
- Smooth 0-10V dimming, down to 0%
- Available in white and black finishes


TYPICAL APPLICATIONS:




Warehouses



Manufacturing & Production areas




Gymnasiums

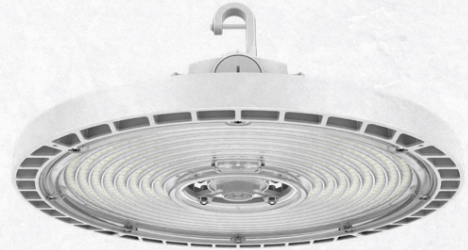

ITEM NUMBER	FINISH	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	HID REPLACEMENT WATTAGE	DLC PRODUCT ID PREMIUM
HBR-150CLS-CR-BL HBR-150CLS-CR-WH	Black White	120-277V	150W	23,000	153	4000K/5000K	450W HID	S-XHTNLV S-97L67K
			125W	19,500	156		380W HID	
			100W	16,000	160		300W HID	
HBR-240CLS-CR-BL HBR-240CLS-CR-WH	Black White		240W	36,000	150		750W HID	S-FM0D5K S-DCPW84
			200W	30,000	150		650W HID	
			160W	24,500	153		500W HID	



RoHS



HIGH BAY ACCESSORIES

FOR USE WITH LINEAR HIGH BAY:


ITEM NUMBER	DESCRIPTION
HBL-110W-WG	WIRE GUARD FOR 14" 110W LINEAR HIGH BAY
HBL-175-215W-WG	WIRE GUARD FOR 18" 175W-215W LINEAR HIGH BAY
HBL-320W-WG	WIRE GUARD FOR 23" 215W-320W LINEAR HIGH BAY
HLB-420W-WG	WIRE GUARD FOR 46" 420W LINEAR HIGH BAY
HBL-110-215W-SMK	SURFACE MOUNT KIT FOR 14-18" 110W-215W LINEAR HIGH BAY
HBL-320-420W-SMK	SURFACE MOUNT KIT FOR 23"-46" 320W-420W LINEAR HIGH BAY
HBL-110-215W-PMK	PENDANT MOUNT KIT FOR 14-18" 110W-215W LINEAR HIGH BAY
HBL-320-420W-PMK	PENDANT MOUNT KIT FOR 23"-46" 320W-420W LINEAR HIGH BAY




HBL-110W-WG



HLB-175-215W-WG




HLB-420W-WG



HBL-320W-WG



HBL-110-215W-SMK
HBL-320-420W-SMK



HBL-110-215W-PMK
HBL-320-420W-PMK

FOR USE WITH ROUND HIGH BAY:

ITEM NUMBER	DESCRIPTION
HBR-40W-EMKIT	40W EM BATTERY BACKUP KIT



CONTROLS: FOR USE WITH LINEAR & ROUND HIGH BAY

ITEM NUMBER	DESCRIPTION
EFS07-AUX	12V PIR MOTION SENSOR WITH DAYLIGHT SENSOR, SINGLE PIN AUX CONNECTOR
RM51	REMOTE CONTROL FOR USE WITH EFS07-AUX
HBL1-2-W	HIGH BAY LENS FOR EFS07 AND EFS106 SENSOR MUST PURCHASE WITH EFS07-AUX



EFS07-AUX motion sensor with HBL1-2-W lens cap must purchase together



RM51

LINEAR VAPOR TIGHT CCT & LUMEN SELECT

FEATURES


- Rugged and durable design with gray UL 5VA flame rated polycarbonate housing
- Suitable for harsh environments with IP66 Rated, IK08 impact rating, NSF Rated
- Toolless entry with stainless steel latching clips provides quick access
- Smooth 0-10V dimming down to 10%
- Multiple options with 4ft and 8ft lengths and EM battery backup option available



TYPICAL APPLICATIONS:



Parking Garages



Work Sites



Harsh
Environments

ITEM NUMBER	FINISH	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	HID REPLACEMENT WATTAGE
VT4-50CLS * VT4-50CLS-EM	4FT	120-277V	50W	7,750	155	3500K/4000K/5000K	2 lamp 32W T8
			40W	6,280	157		
			30W	4,800	160		
VT8-100CLS	8FT		100W	15,500	155		4 lamp 32W T8
			80W	12,560	157		
			60W	9,600	160		

RoHS



* Select models



WAFER DOWNLIGHTS

CCT SELECT

FEATURES

- Canless Design- no recessed housing required, features a remote J-Box
- Ultra thin design provides flexibility to fit in shallow ceilings
- Phase cut dimming, down to 10%
- Type IC Rated: Rated for use in insulated and non-insulated ceilings


TYPICAL APPLICATIONS:



Residential




Multi-family

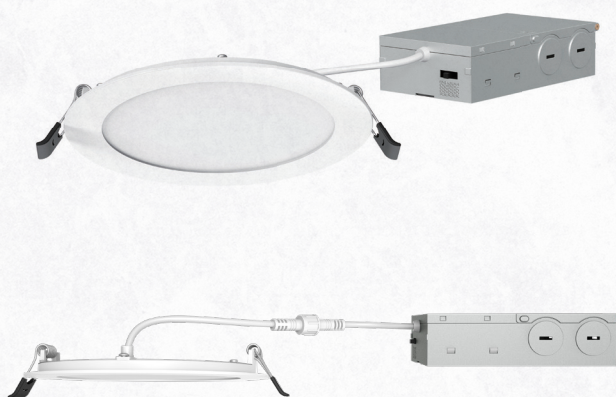

ITEM NUMBER	SIZE	TRIM STYLE	INPUT VOLTAGE	WATTAGE	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	INCANDESCENT REPLACEMENT WATTAGE
WLR3-7-CS	3"	Smooth	120V	7W	590	84	2700K/3000K/3500K/4000K/5000K	50W
WLR4-9-CS	4"			9W	790	88		65W
WLR4-10-CS	4"			10W	1,000	100		75W
WLR6-12-CS	6"			12W	1,100	92		75W
WLR6-18-CS	6"			18W	1,600	89		100W



RoHS



WAFER DOWNLIGHTS

CCT & LUMEN SELECT

FEATURES

- Canless Design- no recessed housing required, features a remote J-Box
- Ultra thin design provides flexibility to fit in shallow ceilings
- Phase cut dimming, down to 10%
- 90CRI delivers exceptional color quality
- Type IC Rated: Rated for use in insulated and non-insulated ceilings



TYPICAL APPLICATIONS:



Residential




Multi-family



ITEM NUMBER	SIZE	TRIM STYLE	INPUT VOLTAGE	WATTAGE	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	INCANDESCENT REPLACEMENT WATTAGE
WLR4-10-CLS	4"	Smooth	120V	6W	530	88	2700K/3000K/3500K/4000K/5000K	40W
				8W	710	89		50W
				10W	900	90		65W
WLR6-13-CLS	6"			7W	630	90		55W
				9W	810	90		60W
				12.5W	1,130	90		75W




RoHS




WAFER DOWNLIGHTS ACCESSORIES


ACCESSORIES: FOR USE WITH WAFER DOWNLIGHTS

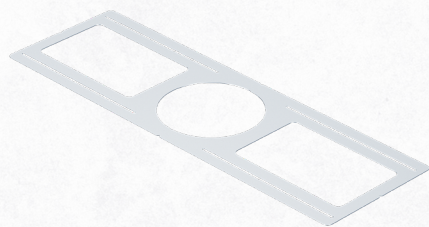


4" FRAME KIT

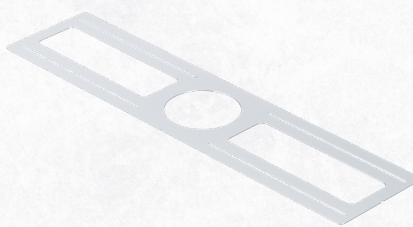

6" FRAME KIT

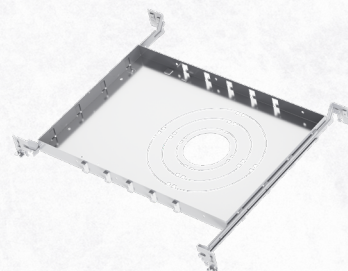


4", 6", 8" FRAME KIT WITH NAIL BAR HANGER

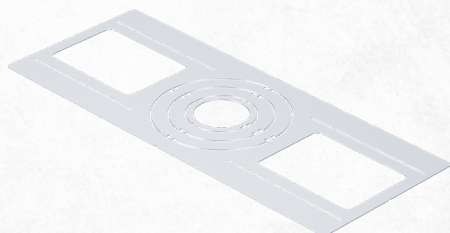

3", 4", 6" UNIVERSAL FRAME KIT



EM BATTERY BACKUP KIT 12W

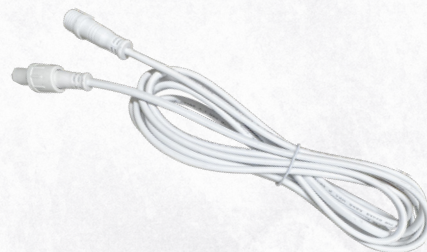

10FT CABLE KIT

ACCESSORY ORDER INFORMATION:


ITEM NUMBER	DESCRIPTION
WL4-FRAME	4" Frame Kit
WL6-FRAME	6" Frame Kit
WL468-FRAME-NB	4", 6", 8" Frame Kit with Nail Bar Hanger
WL3468-FRAME	Universal Frame Kit
WL-EM-12W	12W EM Battery Backup Kit (not compatible with 3-inch fixture WLR3-7-CS)
WL-CABLE-10FT	10FT Cable Kit

RECESSED/RETROFIT DOWNLIGHTS

CCT SELECT

FEATURES

- Durable construction-aluminum housing with integrated heatsink and polycarbonate lens
- Quick & easy install includes spring clips and E26 adapter base for fast setup
- Phase cut dimming, down to 10%
- 90CRI delivers exceptional color quality
- Type IC Rated: Rated for use in insulated and non-insulated ceilings

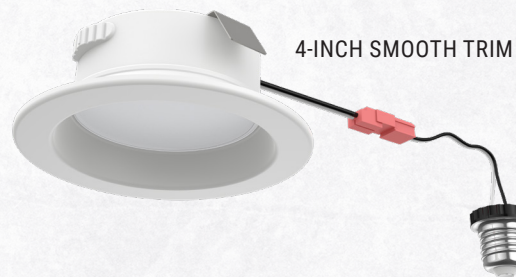

TYPICAL APPLICATIONS:



Residential




Multi-family

ITEM NUMBER	SIZE	TRIM STYLE	INPUT VOLTAGE	WATTAGE	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	INCANDESCENT REPLACEMENT WATTAGE
RTK4S-10-CS	4"	SMOOTH	120V	10W	920	92	2700K/3000K/3500K/ 4000K/5000K	65W
RTK4B-10-CS		BAFFLE						
RTK6S-15-CS	6"	SMOOTH		15W	1,400	93		75W
RTK6B-15-CS		BAFFLE						



RoHS



DISK LIGHTS

CCT SELECT

FEATURES

- Sleek low profile design allows fixture to be domed with ceiling
- Hassel-free installation with twist lock frosted lens providing toolless entry
- Phase cut dimming, down to 10%
- 90CRI delivers exceptional color quality
- AT & IC Rated: Rated for use in insulated and non-insulated ceilings and airtight per ASTM-E283

TYPICAL APPLICATIONS:



Residential




Multi-family



ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	INCANDESCENT REPLACEMENT WATTAGE
DL4-10-CS	4"	120V	10W	850	85	2700K/3000K/3500K/4000K/5000K	65W
DL6-15-CS	6"		15W	1,300	87		75W



RoHS



A19 LAMP ECONOMY

FEATURES

- Energy efficient replacement for traditional incandescent and halogens lamps
- Shatter proof plastic lens with E26 base
- Not Suitable for use in totally enclosed luminaries.
- Non-dimmable

TYPICAL APPLICATIONS:



Residential




Multi-family



ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	EFFICACY (LM/W)	CCT	INCANDESCENT REPLACEMENT WATTAGE
A19-9W-830-ECO	120V	9W	800	89	3000K	60W
A19-9W-850-ECO					5000K	
A19-14W-830-ECO		14W	1,500	107	3000K	100W
A19-14W-850-ECO					5000K	




RoHS



LINEAR T8 TUBES - BALLAST BYPASS

CCT SELECT




FEATURES

- Direct-Wire Operation- no ballast required
- Shatter proof protection with PET coating contains glass for added safety
- Frosted glass tube construction with G13 medium-pin base
- Single & double end wiring connection



TYPICAL APPLICATIONS:

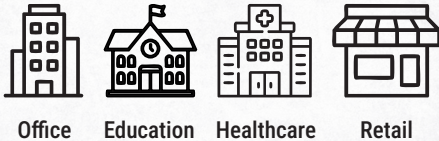


Office Education Healthcare Retail

ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	FLUORESCENT REPLACEMENT WATTAGE
LT82-9WCS-GCSDE-BYP	2FT	120-277V	9W	1,200	133	3000K/3500K/4000K/5000K/6500K	17W T8
LT83-12WCS-GCSDE-BYP	3FT		12W	1,600			25W T8
LT84-14WCS-GCSDE-BYP	4FT		14W	1,850	132		32W T8



RoHS




LINEAR T8 TUBES - BALLAST BYPASS

CCT & LUMEN SELECT

FEATURES

- Switchable lamp base- swap between Fa8 (pre-assembled) and R17d base
- Direct-Wire Operation- no ballast required
- Shatter proof protection with PET coating contains glass for added safety
- Frosted glass tube construction with G13 medium base with Fa8 cap
- Double end wiring connection

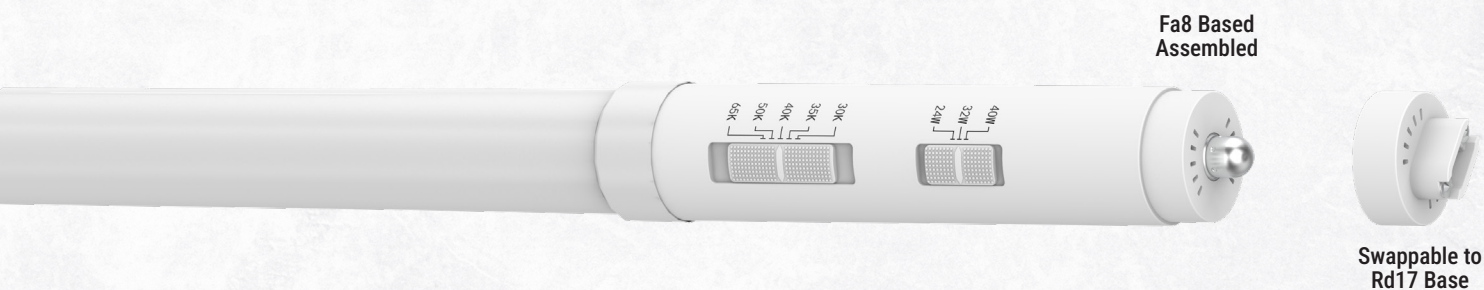

TYPICAL APPLICATIONS:




Office Education Healthcare Retail

ITEM NUMBER	SIZE	INPUT VOLTAGE	WATTAGE SELECT	LUMENS 4000K	EFFICACY (LM/W)	CCT SELECTABLE	FLUORESCENT REPLACEMENT WATTAGE
LT88-40WCS-GCDE-BYP	8FT	120-277V	24W	3,500	146	3000K/3500K/4000K/5000K/6500K	86W T8
			32W	4,400	138		86W T8
			40W	5,500	138		110W T12



RoHS




TEMPORARY STRING LIGHTS


FEATURES

- Heavy duty construction with shatterproof frosted lens
- Linkable for additional coverage
- 2-prong plug with weatherproof cover and NEMA 5-15R Daisy chain receptable
- Available in 50FT & 100FT lengths


TYPICAL APPLICATIONS:





Temporary Work
Lighting

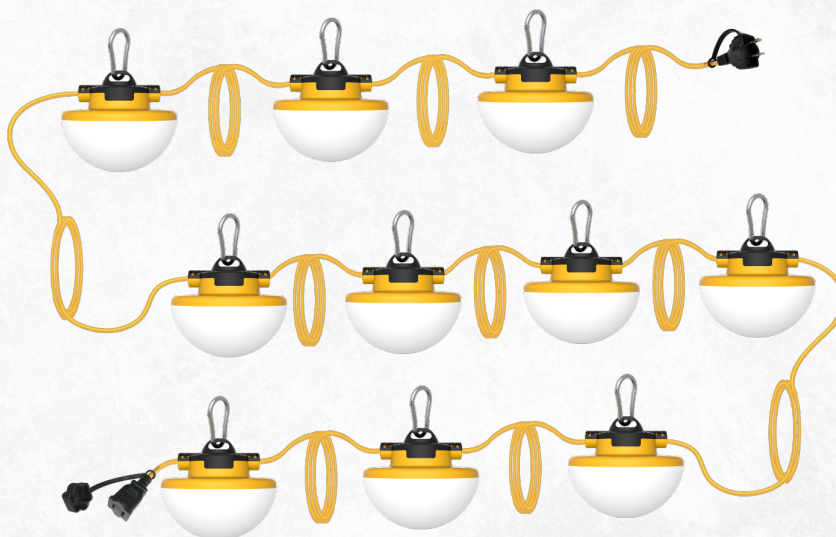

ITEM NUMBER	LENGTH	INPUT VOLTAGE	NUMBER OF LAMP HEADS	WATTAGE	WIRE TYPE	LUMENS	LINKABLE UP TO	INCANDESCENT REPLACEMENT
TSLED-50W-2P50	50FT	120V	5	50W	SPT-2W 18/2 AWG 2-PRONG	6,000	8 SETS, 400FT	450W
TSLED-100W-2P100	100FT		10	100W		12,000	4 SETS, 400FT	850W
TSLED-130W-2P100				130W	SJTW 18/2 AWG 2-PRONG	16,000	3 SETS, 300FT	1,000W



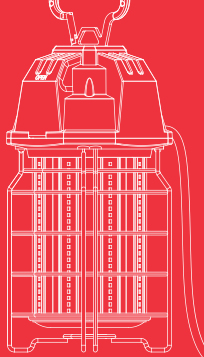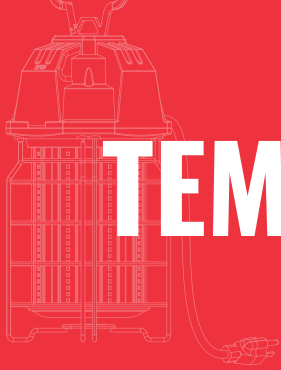

TEMPORARY WORK LIGHT

FEATURES

- Heavy duty construction
- Corrosion resistant heavy-duty safety cage with lamp safe guard
- Easy install with hook and 6ft power cord with NEMA 5-15 plug included



TYPICAL APPLICATIONS:




Temporary Work
Lighting



ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	CCT	WIRE SIZE	LINKABLE UP TO
TM-100W	120V	110W	12,000	5000K	SJTW 3/C 18AWG	7 sets



Intertek



VAPOR TIGHT JELLY JAR FIXTURE

FEATURES

- Lamp not included- fixture only
- Provides dust-tight and waterproof protection in harsh environments
- Heavy duty construction with die-cast aluminum housing & clear glass globe
- For use with A19 /E26 base lamps max 120V, 150W incandescent, 15W LED

TYPICAL APPLICATIONS:



Work Sites
&
Harsh Environments



ITEM NUMBER	MOUNT TYPE	NPT THREAD SIZE	INCANDESCENT REPLACEMENT	LED REPLACEMENT
VTJ-150-CM	CEILING MOUNT	1/2"	150W	15W
VTJ-150-WM	WALL MOUNT			



EMERGENCY LIGHT



FEATURES

- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards
- 90 minute battery backup run time
- High impact flame retardant thermoplastic housing
- Dual adjustable lamp heads provide 360° positioning, ensuring precise light coverage in any space
- Push to test and AC indicator light provides easy maintenance
- Wall mount with hardware included



ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	NUMBER OF LAMP HEADS	CA T20
EML2-2W-WH	120/277V	2.4W	150	2	YES




RoHS



EXIT SIGN & EXIT & EMERGENCY COMBO RED/GREEN SELECT LETTERS

FEATURES


- Red/Green switchable letters at installation with interchangeable panel inserts
- 90-MINUTE battery backup for reliable operation during power outages
- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards
- Easy maintenance with push to test and AC indicator light
- Two styles available exit sign and exit and emergency combo

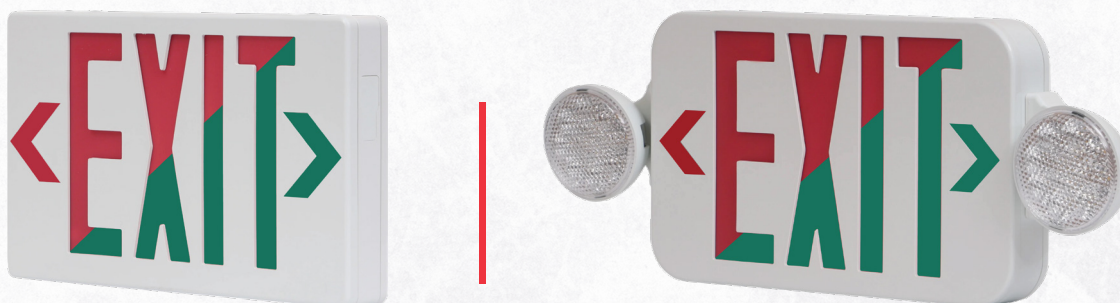

ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LETTER COLOR	NUMBER OF FACES	STYLE
EXS-RGSW	120-277V	3.5W	RED	Single/Double	EXIT SIGN
EXEMC-RGSW		1.8W			EM COMBO



NYC EMERGENCY LIGHT

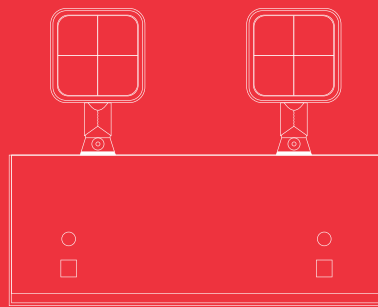

FEATURES

- NYC compliant with white steel housing
- 90-minute NiMH battery backup for reliable operation during power outages
- Easy maintenance with push to test and AC indicator light
- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards
- Adjustable dual lamp heads for full range flexibility
- Surface Mount Options- ceiling or wall mount capabilities, canopy kit included.



ITEM NUWMBER	HOUSING COLOR	INPUT VOLTAGE	WATTAGE	LUMENS	LETTER COLOR	HOUSING
EML2-W-NYC	White	120/277V	2.5W	280	Red	Steel



NYC APPROVED EXIT SIGNS

FEATURES

- NYC compliant with 8" red letters & 1" stroke
- 90-minute Ni-Cad battery backup for reliable operation during power outages
- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards
- Easy maintenance with push to test and AC indicator light
- Two styles available- traditional and Modern edge-lit style with single clear face and double mirror face option



TRADITIONAL



EDGE-LIT

ITEM NUMBER	STYLE	INPUT VOLTAGE	WATTAGE	LETER COLOR	FINISH	PANEL TYPE	NUMBER OF FACES
EXS-RW-NYC	TRADITIONAL	120/277V	3.8W	RED	WHITE STEEL HOUSING	/	SINGLE/DOUBLE
EXSEL-SFC-DFM-NYC	EDGE-LIT		4.5W		BRUSHED ALUMIUMUM	CLEAR SINGLE FACE DOUBLE MIRROR FACE	



NYC APPROVED EXIT & EMERGENCY COMBO

FEATURES

- 90-minute Ni-Cad battery backup for reliable operation during power outages
- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards
- Steel housing with white finish and adjustable LED lamp heads
- Easy maintenance with push to test and AC indicator light



ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	LETER COLOR	HOUSING	NUMBER OF FACES
EXEMC-RW-NYC	120/277V	3.8W	280	RED	STEEL	SINGLE/DOUBLE



PRODUCT LISTINGS:



The DesignLights Consortium® (DLC) is a nonprofit organization that establishes performance and quality standards for commercial lighting products. Its Qualified Products List (QPL) is widely used by utilities, energy-efficiency programs, and the lighting industry to identify high-performing, energy-efficient lighting solutions that meet rigorous criteria for quality, reliability, and efficiency.



ENERGY STAR® is a trusted symbol for energy efficiency. Products with ENERGY STAR certification meet strict performance standards, helping customers save energy, reduce costs, and protect the environment—without sacrificing quality or performance.



products have been tested and certified by Underwriters Laboratories to meet strict safety and performance standards.



ELECTRICAL TESTING LABORATORIES (ETL). Independent testing requirement to meet strict performance standards, like UL Listings.



products meet California's strict energy efficiency standards for lighting.



products meet California's stringent building and energy efficiency codes for lighting, ensuring high performance, energy savings, and eligibility for state rebates in both residential and commercial projects.



National Sanitation Foundation certification products are independently tested and verified to meet strict public health and safety standards, ensuring they are safe, reliable, and suitable for use in foodservice and other hygiene-sensitive environments.



ETL Sanitation Certification is also like NSF where products are independently tested and verified to meet strict public health and safety standards, ensuring they are safe, reliable, and suitable for use in foodservice and other hygiene-sensitive environments.



Fixtures are designed for areas that are occasionally exposed to moisture or condensation, protecting the electrical components while ensuring safe and reliable operation.



Fixtures are built to withstand direct exposure to water, drips, or splashes, ensuring safe and reliable performance in both indoor and outdoor spaces.



Fixtures feature an ingress protection (IP) enclosure that is completely dust-tight and resistant to water projected from a nozzle.



Type IC Rated fixtures are rated for use in insulated and non-insulated ceilings preventing overheating.



Airtight Rated fixtures are sealed airtight per ASTM-E283 reducing air leakage for improved energy efficiency.



Fixture has CCT & LUMEN SELECT Technology allowing to choose from a CCT temperatures from warm white to daylight and select your wattage to adjust your light output at installation.



Fixtures has LUMEN SELECT Technology allowing you to adjust your light output at installation.



Fixture has CCT SELECT Technology allowing you to select from a range of CCT temperatures from warm white to daylight at installation.



the fixture has an integrated Emergency Battery Backup to provide light during a power outage.



Fixture has an accessible receptacle for easy install for plug-in controls



Fixtures can be connected in a series.



The Color Rendering Index (CRI) measures how accurately a light source displays colors. Higher CRI values (80 or 90) ensure colors appear vibrant and true to life, creating more natural and visually appealing lighting.

INDEX

FLAT PANELS

PNL14-40CLS-D	7
PNL14-40CLS-DEM	7
PNL22-40CLS-D	7
PNL22-40CLS-DEM	7
PNL24-50CLS-D	7
PNL24-50CLS-DEM	7
PNL-CABLEKIT	7
PNL1X4-FRAMEKIT	7
PNL2X2-FRAMEKIT	7
PNL2X4-FRAMEKIT	7
PNL1X4-RMDWKIT	7
PNL2X2-RMDWKIT	7
PNL2X4-RMDWKIT	7
PNL1X4-FRAMEKIT	7
PNL1X4-RMDWKIT	7
PNL2X4-FRAMEKIT	7
PNL2X4-RMDWKIT	7
PNL2X2-FRAMEKIT	7
PNL2X2-RMDWKIT	7
PNL-CABLEKIT	7

LINEAR STRIPS

LS2-25CLS-D	9
LS-25CLS-D-CR	9
LS-25CLS-D-EM	9
LS-25CLS-D-EMCR	9
LS4-40CLS-D	9
LS4-40CLS-D-CR	9
LS4-40CLS-D-EM	9
LS4-40CLS-D-EMCR	9
LS8-80CLS-D	9
LS8-80CLS-D-CR	9
LS8-80CLS-D-EM	9
LS-CABLEKIT	9
LS-E2ECONN	9
IFS06R	9
RM51	9

LINEAR HIGH BAY

HBL-110CLS-CR	10
HBL-175CLS-CR	10
HBL-215CLS-CR	10
HBL-215CLS-CR-EM	10
HBL-320CLS-CR	10
HBL-420CLS-CR	10

ROUND HIGH BAY

HBR-150CLS-CR-BL	11
HBR-150CLS-CR-WH	11
HBR-240CLS-CR-BL	11
HBR-240CLS-CR-WH	11

HIGH BAY ACCESORIES

HBL-110W-WG	12
HBL-175-215W-WG	12
HBL-320W-WG	12
HLB-420W-WG	12
HBL-110-215W-SMK	12
HBL-320-420W-SMK	12
HBL-110-215W-PMK	12
HBL-320-420W-PMK	12
HBR-40W-EMKIT	12
EFS07-AUX	12
RM51	12
HBL1-2-W	12

LINEAR VAPOR TIGHT

VT4-50CLS	13
VT4-50CLS-EM	13
VT8-100CLS	13

WAFER DOWNLIGHTS

WLR3-7-CS	14
WLR4-9-CS	14
WLR4-10-CS	14
WLR6-12-CS	14
WLR6-18-CS	14
WLR4-10-CLS	15
WLR6-13-CLS	15
WL4-FRAME	16
WL6-FRAME	16
WL468-FRAME-NB	16
WL3468-FRAME	16
WL-EM-12W	16
WL-CABLE-10FT	16

RECESSED/RETROFIT DOWNLIGHTS

RTK4S-10-CS	17
RTK4B-10-CS	17
RTK6S-15-CS	17
RTK6B-15-CS	17

DISK LIGHTS

DL4-10-CS	18
DL6-15-CS	18

A19 LAMP

A19-9W-830-ECO	19
A19-9W-850-ECO	19
A19-14W-830-ECO	19
A19-14W-850-ECO	19

LED T8 TUBES BALLAST BYPASS

LT82-9WCS-GCSDE-BYP	20
LT83-12WCS-GCSDE-BYP	20
LT84-14WCS-GCSDE-BYP	20
LT88-40WCS-GCDE-BYP	21

TEMPORARY STRING LIGHTS

TSLED-50W-2P50	22
TSLED-100W-2P100	22
TSLED-130W-2P100	22

TEMPORARY WORK LIGHT

TM-100W	23
---------------	----

VAPOR TIGHT JELLY JAR FIXTURE

VTJ-150-CM	24
VTJ-150-WM	24

EMERGENCY LIGHT

EML2-2W-WH	25
------------------	----

EXIT SIGN & EXIT & EMERGENCY COMBO SWITCHABLE RED/GREEN

EXS-RGSW	26
EXEMC-RGSW	26

NYC EMERGENCY LIGHT


EML2-W-NYC	27
------------------	----

NYC APPROVED EXIT SIGNS

EXS-RW-NYC	28
EXSEL-SFC-DFM-NYC	28




NYC APPROVED EXIT & EMERGENCY COMBO

EXEMC-RW-NYC	29
--------------------	----

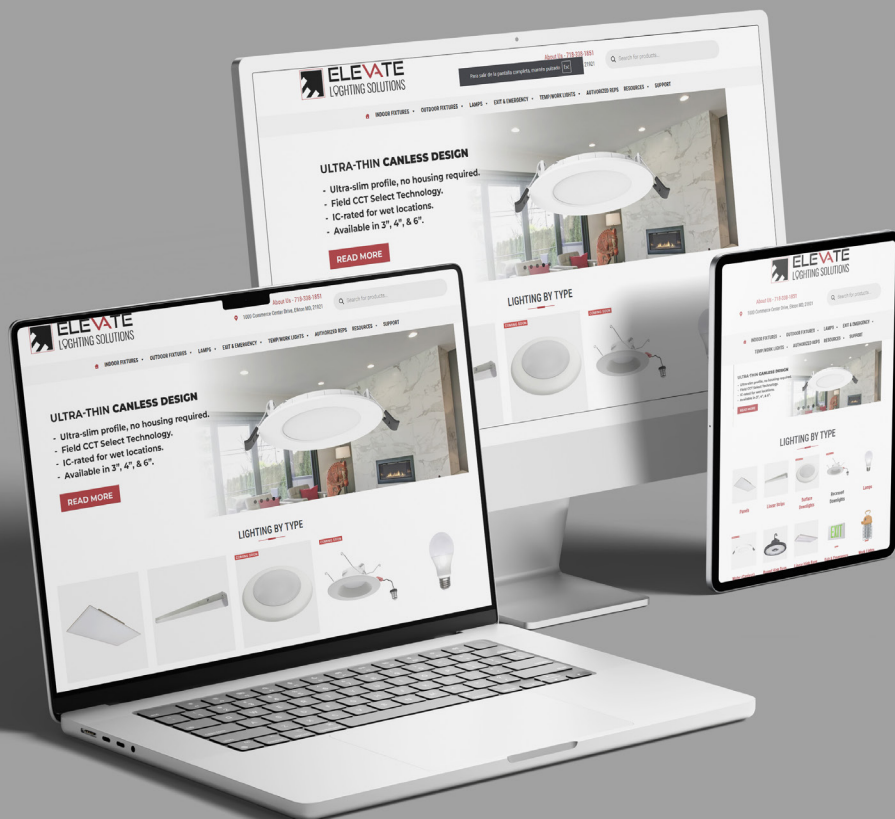

Visit our website:



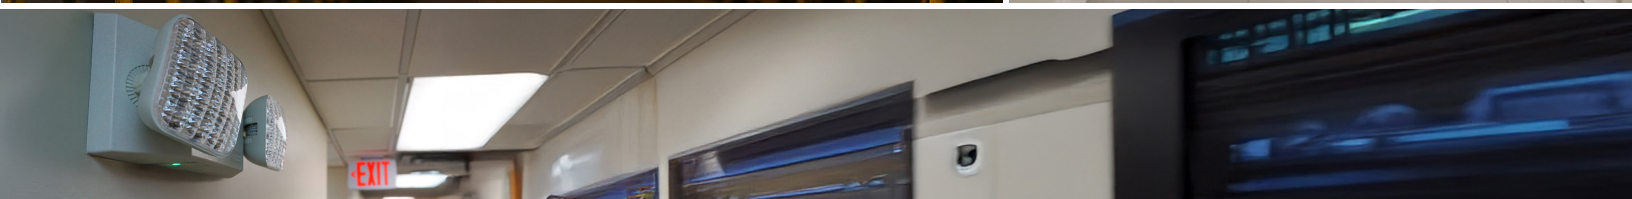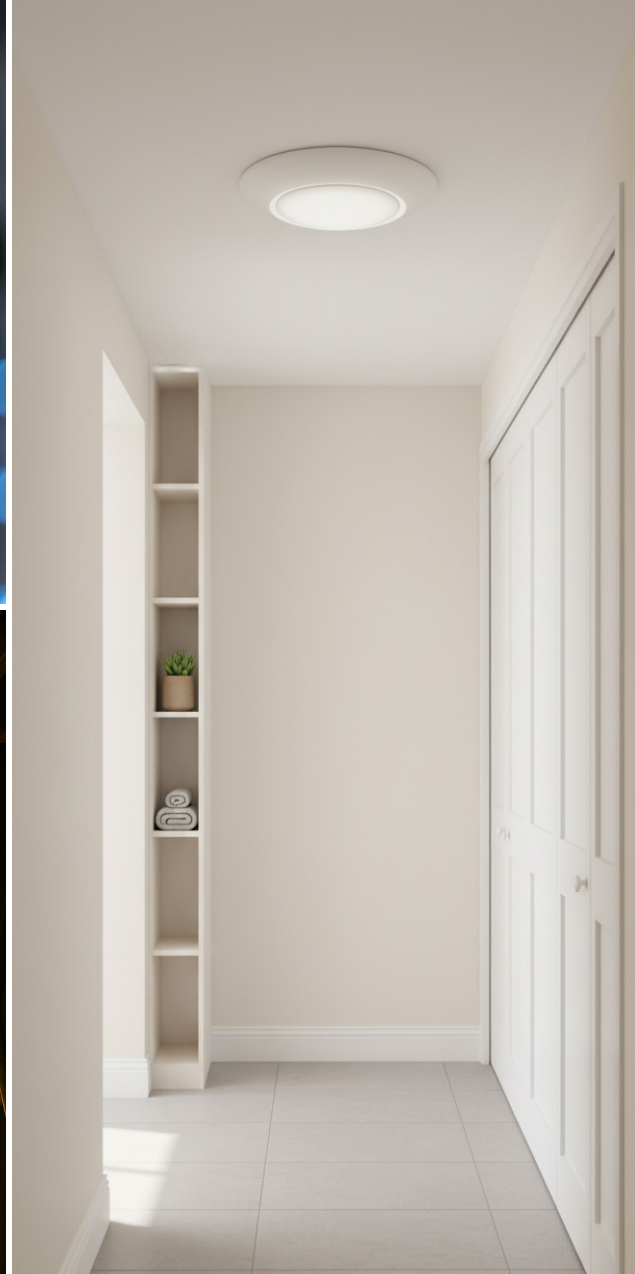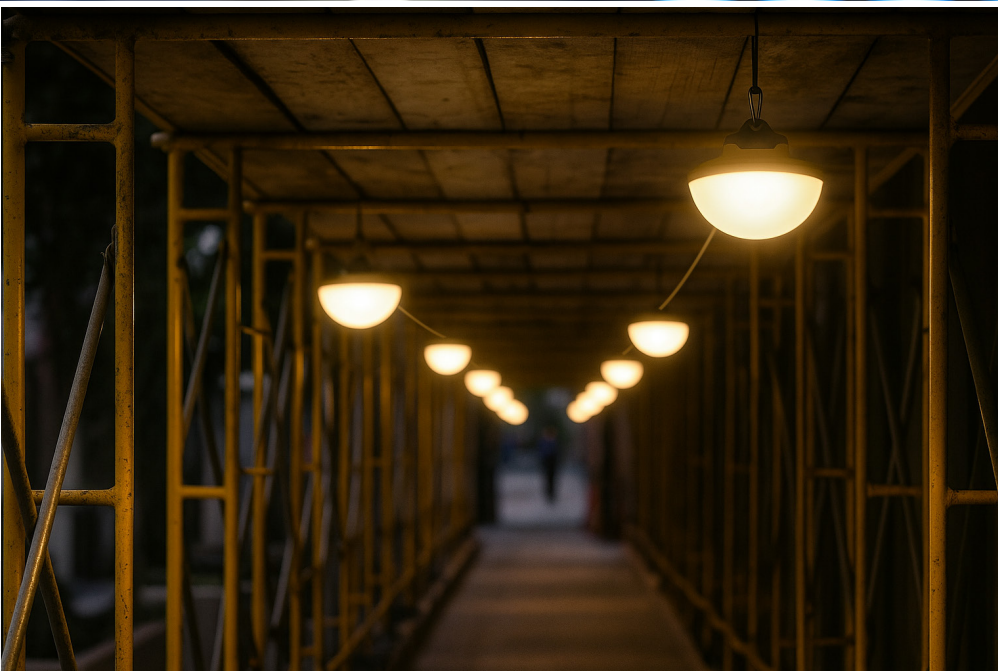

Set The Mood

UNDERSTANDING LIGHT CORRELATED COLOR TEMPERATURE (CCT)

2700K Warm White

3000K Soft White

3500K Neutral White

4000K Cool White

5000K Daylight



ELEVATE
LIGHTING SOLUTIONS



Provides ambient lighting for cozy, calm environment.
Ideal for: living rooms, bedrooms, decorative spaces restaurants, outdoor lighting.
Appearance: The lighting has a warm tone with orange to yellow glow.



Provides natural vibrant light.
Ideal for: Offices, workspaces, schools, healthcare, task lighting, basements, garage.
Appearance: Crisp white light with a natural tone with a slight blue tint.



Provides energizing bright light.
Ideal for: Commercial spaces, large retail spaces, warehouses, grocery stores, security lighting.
Appearance: Blue-white light that mimics natural daylight.



ELEVATE
LIGHTING SOLUTIONS

ELEVATE YOUR SPACE

 1000 Commerce Center Drive, Elkton MD, 21921

 ELEVATE Lighting Solutions

 orders@els-led.com

 718-338-1851

 els-led.com