



LED EXIT & EMERGENCY COMBO NYC APPROVED



PROJECT:

#ITEM:

DATE:

PREPARED BY:


FEATURES

- **NYC compliant** with 8" red letters & 1" stroke
- **90-minute** NiMH battery backup for reliable operation during power outages
- **Easy maintenance** with push to test and AC indicator light
- Meets **NFPA70, NFPA 101, UL924, NEC/OSHA** Standards
- **Adjustable dual lamp heads** for full range flexibility
- **Surface Mount Options**- wall or side mount capabilities, canopy kit included

PRODUCT CERTIFICATIONS



PRODUCT FEATURES



ORDERING INFORMATION

EXEMC-RW-NYC

Product Family	LETTER COLOR	HOUSING COLOR	NYC APPROVED
EXEM = EXIT & EMERGENCY COMBO	R= RED LETTER	W = WHITE	NYC = NYC APPROVED



TECHNICAL SPECIFICATIONS

ELECTRICAL

- Dual input voltage 120/277V 50/50Hz
- 24 hour recharge time
- 32°F to 104°F ambient operating temp

CONSTRUCTION

- Steel housing
- 8" RED letters with 1" stroke
- Removeable knockout chevron directional arrows
- Adjustable dual lamp heads

COMPLIANCE

- UL Certified
- Suitable for damp locations
- Meets NFPA70, NFPA 101, UL924, NEC/OSHA Standards

OPTICAL

- 280 lumens
- 6500K Daylight CCT
- 80CRI

EM BATTERY BACK UP

- NiMH battery
- 4.8V output voltage
- 7.2Wh power rating
- 90 minutes of run time during outage

INSTALLATION

- Surface mount
- Canopy, bracket and hardware included
- Blank cover plate included

WARRANTY

- 5 year warranty

PERFORMANCE DATA


ITEM NUMBER	INPUT VOLTAGE	WATTAGE	LUMENS	LETTER COLOR	HOUSING	NUMBER OF FACES
EXEMC-RW-NYC	120/277V	3.8W	280	RED	STEEL	SINGLE/DOUBLE

SPACING GUIDELINES

Item Number	Mounting Height (FT)	Path of Egress (FT)	Center to Center Spacing (FT)
EXEMC-RW-NYC	7.5	3	35
		6	27
	10	3	26
		6	22

100FT Corridor

Compliant NFPA 101 requires 1.0 foot-candle average and 0.1 foot-candle minimum with 40:1 max/min ratio

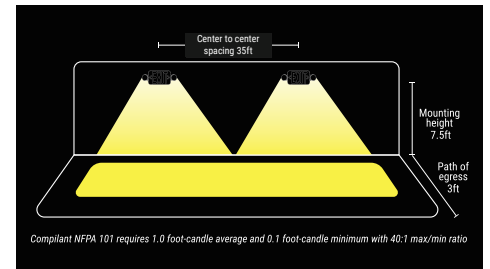


SHIPPING DATA

ITEM NUMBER	UPC	MASTER PACK QTY	PALLET DIMENSION	PALLET QTY (PCS)
EXEMC-RW-NYC	840526245284	4	47.25" x 39.37" x 84.84"	160



PRODUCT DIMENSIONS

EXEMC-RW-NYC

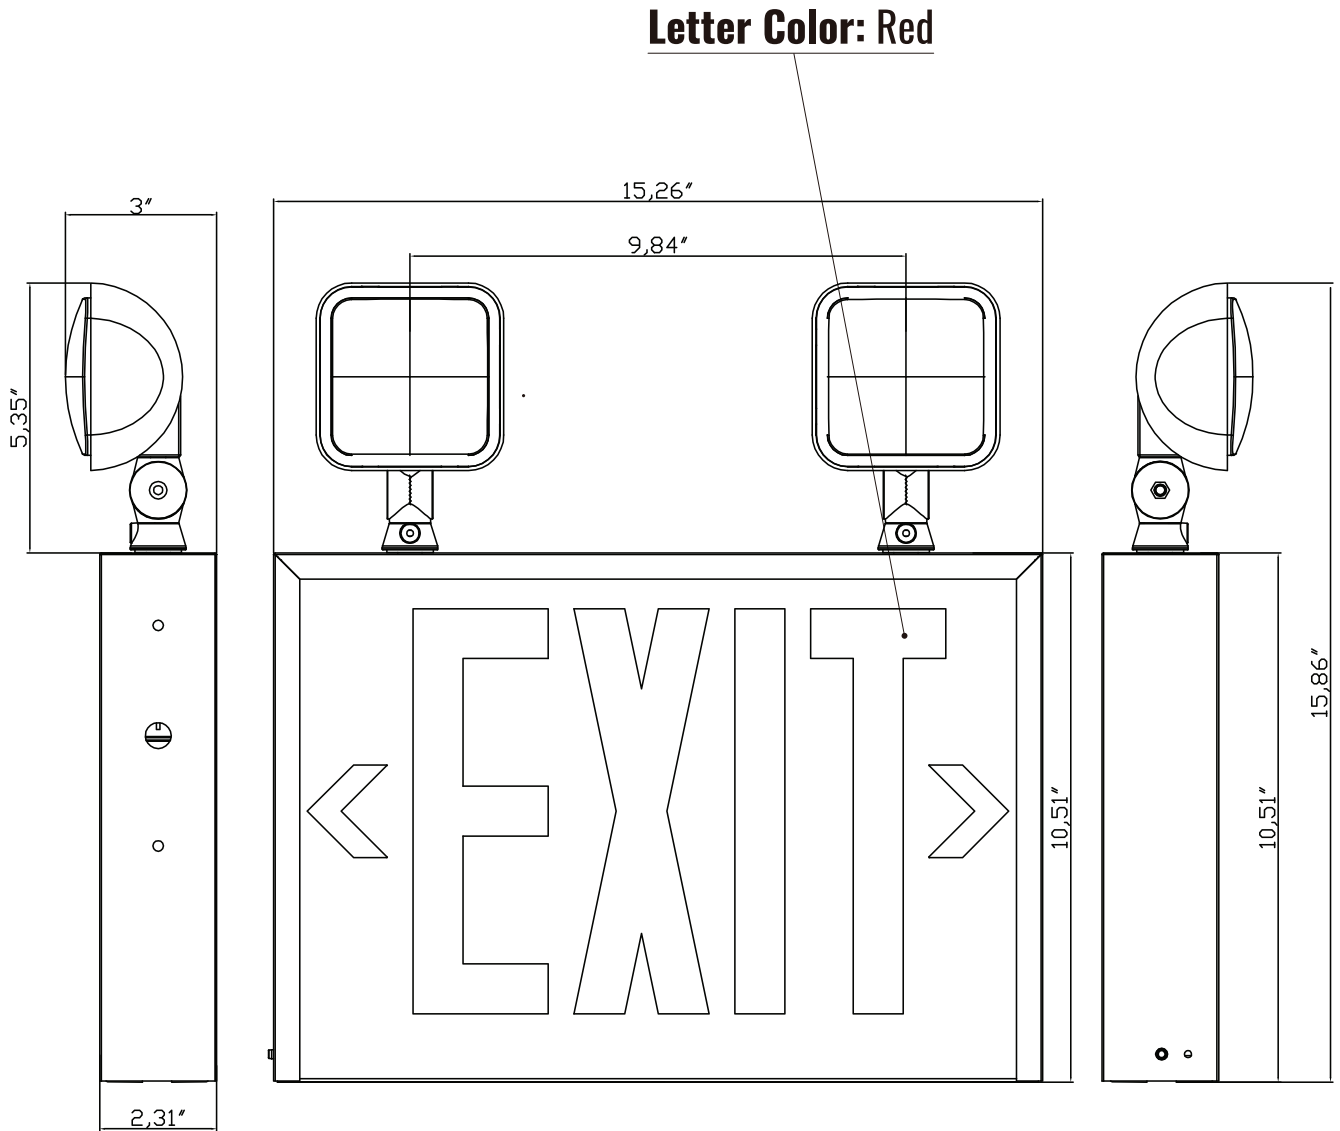

Notes:

Not for sale in California

Specifications subject to change without notice. Replacement wattage shown depends on application and fixture.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.