



CATEGORY
**LIGHTING &
ACCESSORIES**

AMMO ITEM #

TLS/100

Company: _____

Job: _____ #Item: _____

Notes: _____

Portable String Light



FEATURE

Join 15 chains of the TLS/100, 100 ft

POWER CORD STRUCTURAL SIZE STANDARDS

- Number of conductor cores thickness: _____ 14AWG x 2C
- External protection nominal thickness: _____ 0.76 mm
- Minimal external protection thickness: _____ 0.61 mm
- Insulation nominal thickness: _____ 0.76 mm
- Minimum insulation thickness: _____ 0.69
- At 20°C, the conductor is at its maximum: _____ 8.88 Ω/km

LAMP HOLDERS

- Model: _____ UL Certified
- Rating: _____ 660W / 600V

PLUG / TAIL PLUG


- Rating: _____ 15A / 125V
- Conductor material: _____ Brass

STANDARD MATERIAL


- PVC / Cooper

PACKAGING

- Master Qty.: _____ 2
- Legth: _____ 100 ft
- Weight: _____ 11.90 lb
- UPC Number: _____ 837654061992

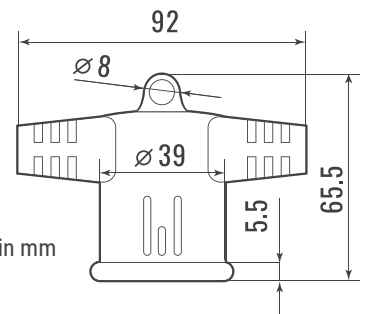

MEASUREMENTS in mm

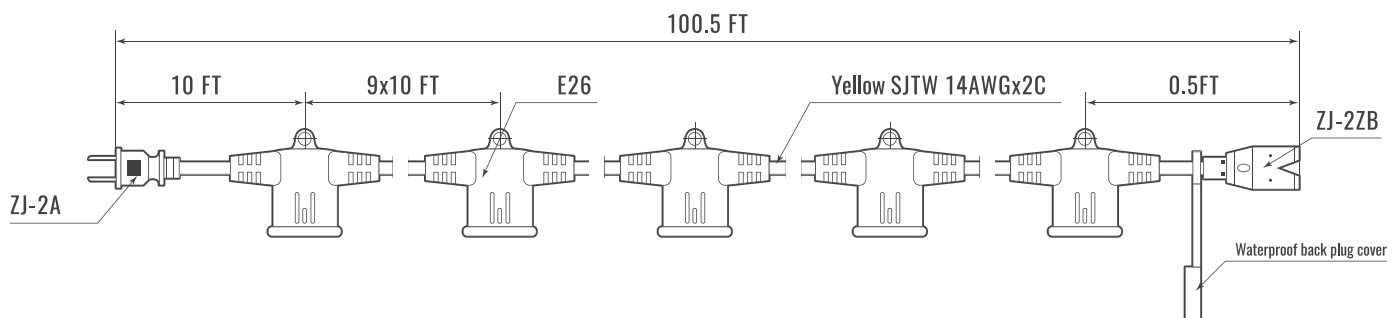

LIGHTING & ACCESSORIES



Ammo International Inc.

1000 COMMERCE CENTER DR ELKTON MD 21921

PHONE : (718).338.1851 FAX : (718).228.1851

orders@ammoelectric.com

www.ammoelectric.com