



ELEVATE
LIGHTING SOLUTIONS

LED HIGH BAYS

LINEAR | ROUND



ELEVATE YOUR SPACE



ELEVATE
LIGHTING SOLUTIONS

ELEVATE YOUR SPACE

Our mission is to **ELEVATE** your space with our innovative, energy-efficient lighting solutions designed with top-quality and cutting-edge technology. As part of the Ammo International brand, we are committed to providing a seamless experience with top-notch customer service. We strive to become your one-stop shop for convenience delivering expectational electrical and lighting solutions for both commercial and residential construction markets



FLEXIBLE, POWERFUL, RELIABLE

ELEVATE Lighting Solutions LED High Bays deliver superior performance and fast, hassle-free installation for a wide range of jobsite needs. Built with flexibility in mind, each fixture features **CCT & LUMEN SELECT Technology**, allowing users to easily choose color temperature and wattage with an accessible switch. **CONTROLS READY** features provide a port for quick sensor integration on-site. Available in linear and round designs, these high bays are the reliable solution for both new installations and upgrades from traditional lighting.

LED HIGH BAY ROUND




FEATURES

- **Rugged compact design** with aluminum housing and high-impact polycarbonate lens
- **NSF Rated** certified for food processing environments
- **Built for harsh conditions** with -40°F to 131°F operating temperature for extreme heat and IP65 weatherproof rating
- **Superior performance** with up to 160 (LPW) efficacy
- **Smooth dimming** 0-10V standard dimming



LED HIGH BAY LINEAR

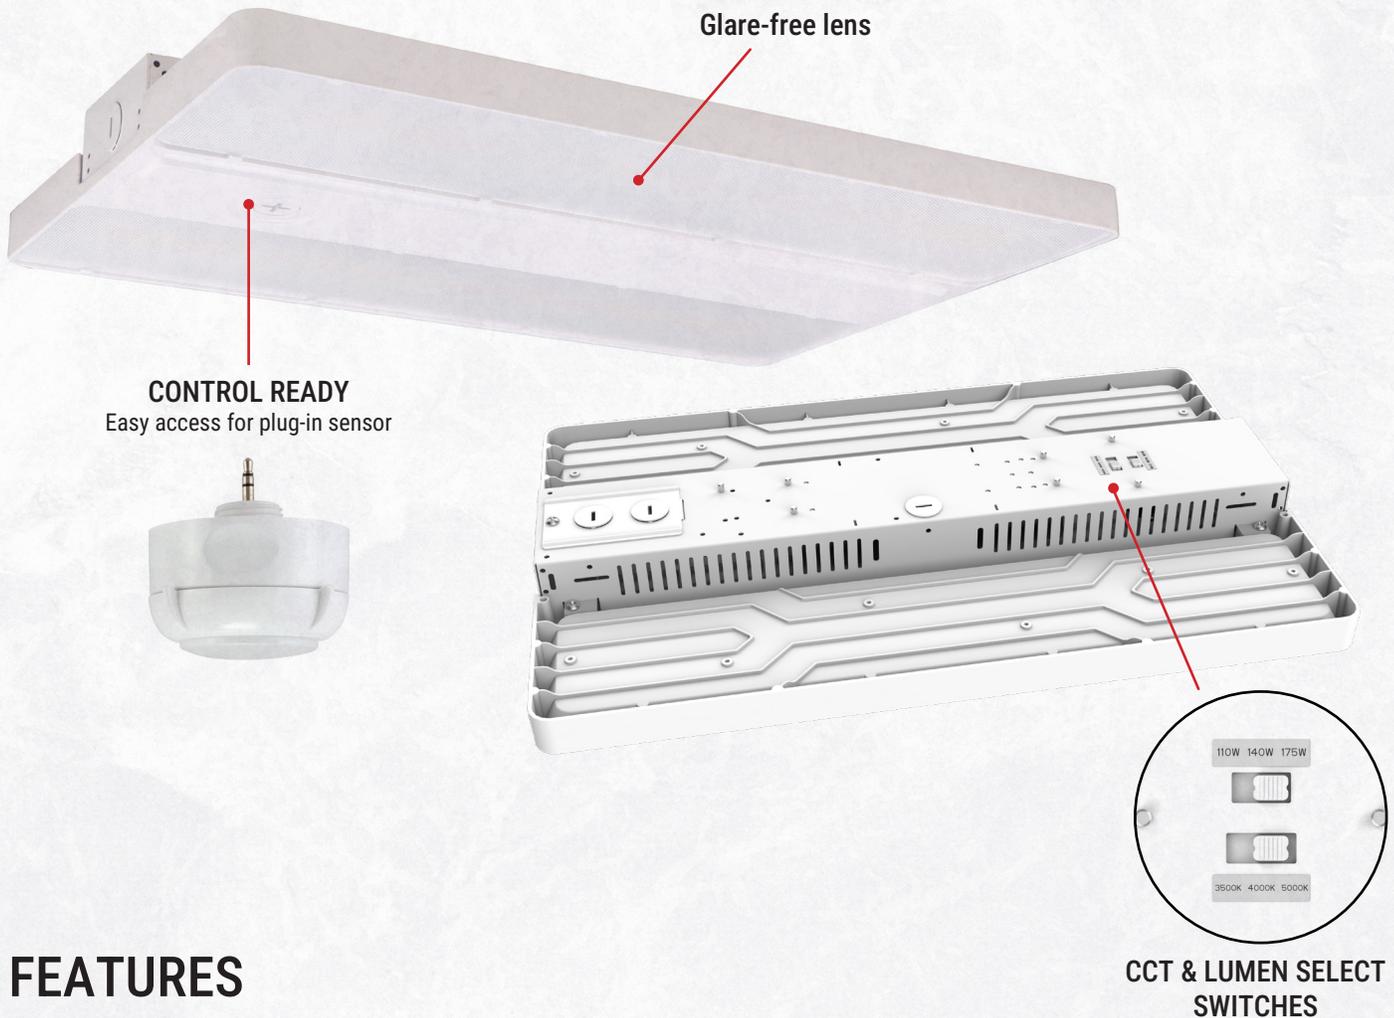

FEATURES

- **Sleek linear design** with durable aluminum housing and polycarbonate lens
- **Built for harsh conditions** with -40°F to 131°F operating temperature for extreme heat and damp location rating
- **Superior performance** with up to 155 (LPW) efficacy
- **Smooth dimming** 0-10V standard dimming
- **Multiple size options** from 14" to 46" lengths for various applications
- **Wide beam angle** provides uniform light distribution across large areas

LED HIGH BAYS

ACCESSORIES

VERSATILE MOUNTING & CONTROL OPTIONS FOR VARIOUS APPLICATIONS

The Linear High Bay fixture comes standard with V-hook and chain for suspension mount applications. Pendant and surface mount kits are available for added flexibility to suit various job requirements and wire guards are available for an extra layer of protection. Boost energy efficiency with optional PIR daylight/occupancy sensor and remote control—compatible with both linear and round high bay models.



ITEM NUMBER	UPC	DESCRIPTION	MASTER PACK QTY
EFS07-AUX	/	12V PIR MOTION SENSOR WITH DAYLIGHT SENSOR, SINGLE PIN AUX CONNECTOR	50
RM51	/	REMOTE CONTROL FOR USE WITH EFS07-AUX	100
HBL-110W-WG	837654144725	WIRE GUARD FOR 14" 110W LINEAR HIGH BAY	10
HBL-175-215W-WG	837654144732	WIRE GUARD FOR 18" 175W-215W LINEAR HIGH BAY	10
HBL-320W-WG	837654144749	WIRE GUARD FOR 23" 320W LINEAR HIGH BAY	10
HBL-420W-WG	837654144756	WIRE GUARD FOR 46" 420W LINEAR HIGH BAY	10
HBL-110-215W-SMK	837654144763	SURFACE MOUNT KIT FOR 14-18" 110-215W LINEAR HIGH WAY	40
HBL-320-420W-SMK	837654144770	SURFACE MOUNT KIT FOR 23-46" 320W-420W LINEAR HIGH WAY	40
HBL-110-215W-PMK	837654144787	PENDANT MOUNT KIT FOR 14-18" 110W-215W LINEAR HIGH WAY	20
HBL-320-420W-PMK	837654144794	PENDANT MOUNT KIT FOR 23-46" 320W-420W LINEAR HIGH WAY	20

LED HIGH BAYS

SPECIFICATIONS

LINEAR HIGH BAY

Install Sheet

Spec Sheet



ITEM NUMBER	SIZE	INPUT VOLTAGE / AMPS	WATTAGE SELECT	LUMEN (LM) AT			CCT SELECTABLE	TYPICAL MOUNTING HEIGHT	HID REPLACEMENT		
				3000K	4000K	5000K					
HBL-110CLS-CR	14"	120-277V 0.95A/0.45A	110W	15,231	15,946	15,293	3500K/4000K/5000K	up to 20FT	300W HID		
			85W	12,239	12,656	12,309			250W HID		
			60W	9,117	9,214	9,074			175W HID		
HBL-175CLS-CR	18"	120-277V 1.5A/0.7A	175W	24,520	25,849	24,802		3500K/4000K/5000K	up to 30FT	500W HID	
			140W	20,625	21,383	20,738				400W HID	
			110W	16,385	16,788	16,634				250W HID	
HBL-215CLS-CR HBL-215CLS-CR-EM	23"	120-277V 1.85A/0.85A	215W	29,888	32,243	30,053			3500K/4000K/5000K	up to 35FT	650W HID
			160W	23,499	24,058	23,429					500W HID
			120W	18,389	18,824	18,442					400W HID
HBL-320CLS-CR	23"	120-277V 2.75A/1.25A	320W	43,729	46,407	44,757	3500K/4000K/5000K			up to 49FT	1000W HID
			270W	37,743	39,921	38,300					800W HID
			220W	32,661	33,891	32,696					600W HID
HBL-420CLS-CR	46"	120-277V 3.6A/1.65A	420W	57,216	60,476	59,041		3500K/4000K/5000K		up to 60FT	1300W HID
			380W	52,495	55,149	52,980					1200W HID
			320W	45,835	47,398	45,719					1000W HID

ROUND HIGH BAY

Install Sheet


Spec Sheet



ITEM NUMBER	FINISH	INPUT VOLTAGE / MAX. AMPS	WATTAGE SELECT	LUMENS (LM) SELECT		CCT SELECTABLE	TYPICAL MOUNTING HEIGHT	HID REPLACEMENT	
				4000K	5000K				
HBR-150CLS-CR-BL HBR-150CLS-CR-WH	Black White	120-277V 1.28A/0.56A	150W	23,000	22,000	4000K/5000K	15 to 25FT	450W HID	
			125W	19,500	19,000			380W HID	
			100W	16,000	15,500			300W HID	
HBL-175CLS-CR	18"	120-277V 1.5A/0.7A	240W	36,000	34,500		4000K/5000K	25FT to 40FT	750W HID
			200W	30,000	29,000				650W HID
			160W	24,500	23,000				500W HID



ELEVATE
LIGHTING SOLUTIONS

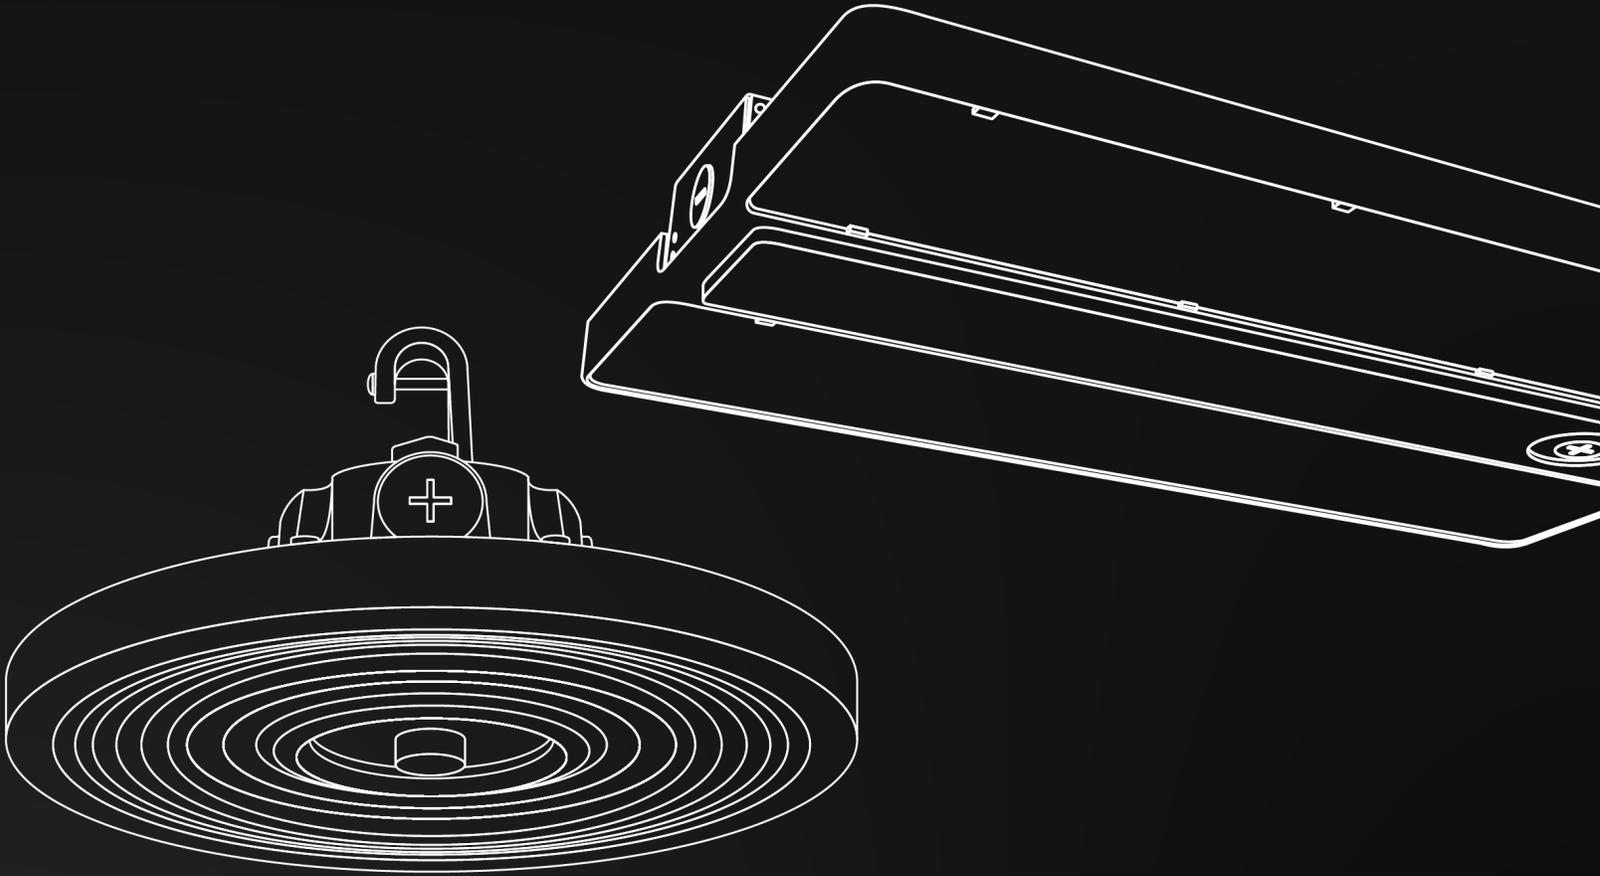

LED HIGH BAYS
LINEAR | ROUND